PRODUCT DATA SHEET

DAB-251T • 701405



PRODUCT DETAILS

The DAB 251T is a rugged cast iron, twin impeller. self-priming, surface mounted jet pump suitable for use in a wide range of applications and especially where there is the requirement to lift water from the source.

The distinctive front casting contains a jet and venturi which provides suction capability of up to 8m.

Proven over many years the DAB 251T is embodiment of a 'Dependable DAB'.

APPLICATIONS

- Suppying water to domestic installations
- Ideal for use in small-scale agriculture or horticulture
- Pressure boosting, irrigation, wash down or other limited industrial services
- Situations where self priming operation is necessary
- Designed for pumping from tanks, rivers and dams where air bubbles or small particles of sand are present



- Self priming centrifugal pump with excellent suction capabilty
- 230V or 400V three phase TEFC motor with in-built auto reset thermal overload to prevent pump from damage

To protect the pump from excessive cycling and to isolate from the effects of water hammer, adding a pressure tank to the system is highly recommneded




TECHNICAL DATA

RATED POWER (P2)	1.85kW (2.5hp)				
MAX. FLOW [LPM]	120 LPM				
MAX. HEAD [M]	62m				
MAX. PRESSURE RATING	8 bar				
FLUID TEMP RANGE	0 - 35 deg C				
MAX. AMBIENT TEMP	40 deg C				
PUMP BODY	GJL 200 Cast Iron				
IMPELLER	Glass reinforced Noryl				
JET, VENTURI, DIFFUSER	Glass reinforced Noryl				
MECHANICAL SEAL	Carbon Ceramic Nitrile				
O RINGS	Nitrile				


RATED VOLTAGE (V)	3~ 230 / 400V 50 hz				
RATED CURRENT (A)	6.9 / 4 A				
RATED SPEED (RPM)	2800 - 2 pole				
IP RATING	I.P. 44				
SUCTION CONNECTION	1 1/4" G (BSP)				
DISCHARGE CONNECTION	1" G (BSP)				
AUTOMATIC OPERATION	No - bare pump only				
MOTOR PROTECTION	Auto re-setting thermal overload				
CARTON DIMENSIONS	657mm L x 248mm W x 279mm H				
GROSS WEIGHT (KG)	35kg				




CURVE

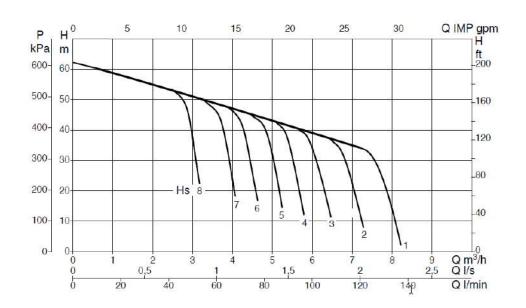

DIMENSIONS

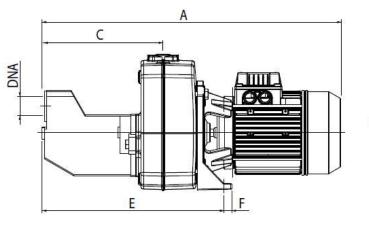



MODEL	A	В	С	E	F	G	ΙØ	н	H1	DNA GAS	DNM GAS
DAB-251 T	558	210	221	350	20	145	11	255	158	1¼"	1"

WARRANTY / CERTIFICATIONS





