

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

504200400

Model :

S4B-5

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 40 °C

Max. Temperature operating :

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Lower support AISI 304 microf use

Impeller Technopolymer A / AISI 304

Diff user Technopolymer A

Impeller Lock nut Stainless steel

Cable cover AISI 304 X5 Cr Ni 1810 UNI 6900/71

Shaft with rotor AISI 304 X5 Cr Ni 1810 UNI 6900/71

Filter Stainless steel

Motor data

Motor brand :

Nominal power P2:



Rated voltage :

Nominal current :

Number of poles :

Rated speed :

Degree of protection :

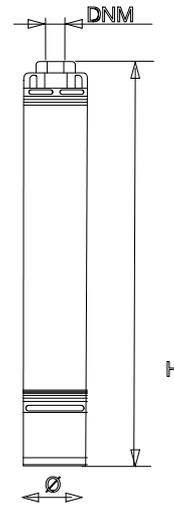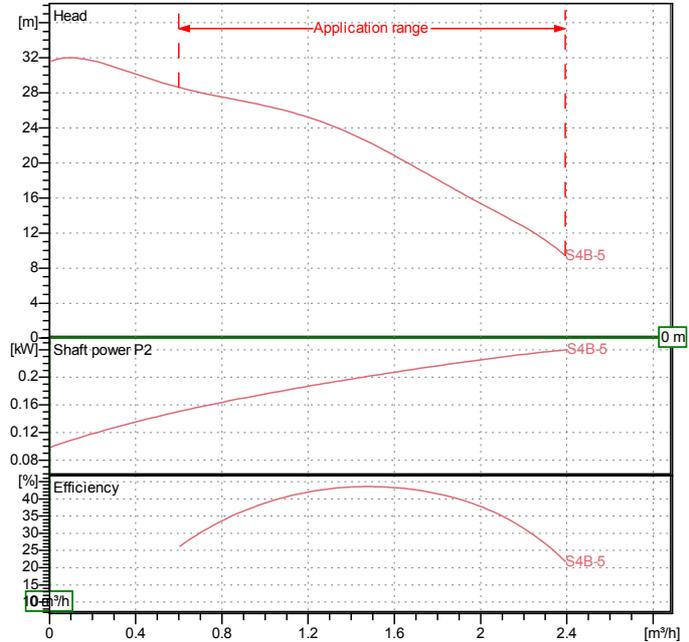Curve tolerance according to ISO 9906

Weight : 3.2 kg

Dimensions in mm

DNM	1"1/4 G-F				
H	294.5				
Ø	97				


Pump connection

 Suction side /
 Discharge side 1" 1/4 G-F / --

Society Reference Address Phone Fax E-mail	Receiver	From
---	-----------------	-------------

S4B-5

Curve tolerance according to ISO 9906

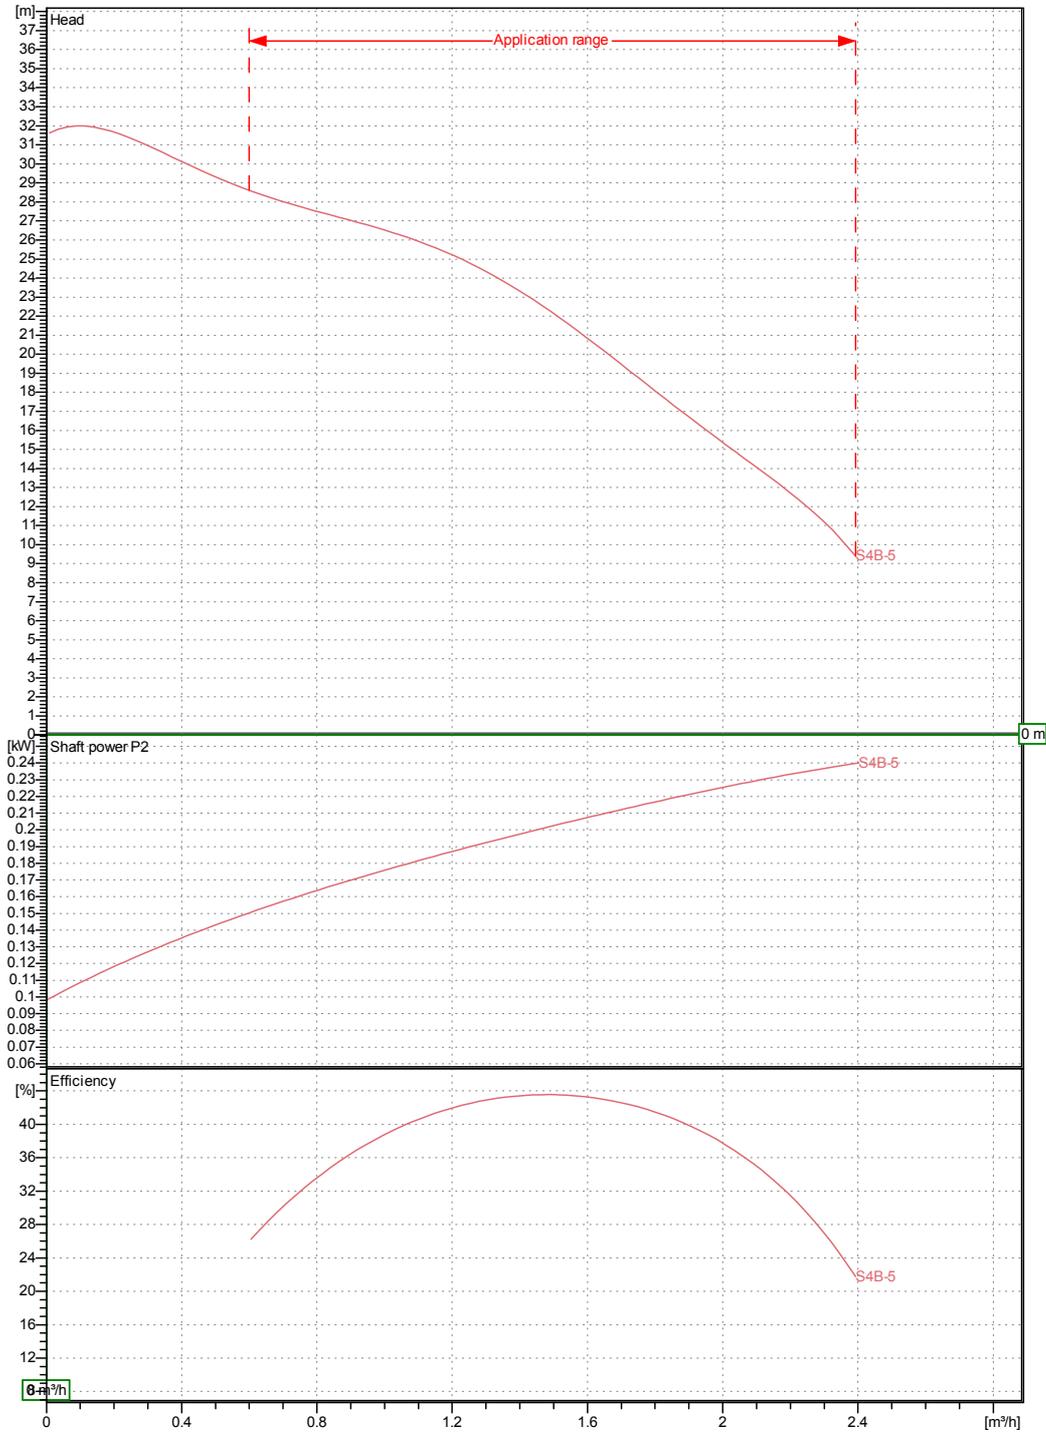

Hydraulic data (duty point)

Suction side	Discharge side 1 " 1/4 G-F	Flow : 0 m³/h	Head : 0 m	Rated speed :
Project	Project ID	Created by	Created on 12/12/2014	



WATER • TECHNOLOGY

DIMENSIONAL DRAWING

12/12/2014

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

S4B-5

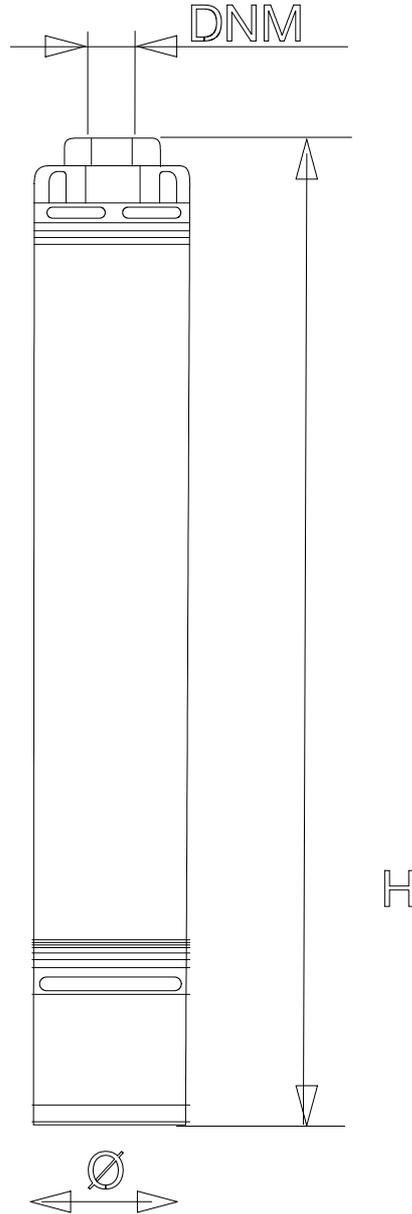

Dimensions in mm

Item	Symbol	Value	Unit	Notes
1	DNM	1"1/4 G-F		
2	H	294.5		
3	Ø	97		

Pump connection

Suction

Discharge
1 " 1/4 G-F
-

Project

Project ID

Created by

Created on

12/12/2014