



aquaknect
FLEXIBLE CONNECTORS

AQUAKNECT 20mm WATER HOSE (Flat Seat End Fittings) **Product Code Prefixed QS05**



Application:

For the connection of hot and cold water appliances to the water service.

Features:

- ▶ Fitted with two hexagonal nuts incorporating flat seat end fittings with sealing washers or BSP male end.
- ▶ Can be used on hot and cold domestic water lines, from +5°C to +65°C.
- ▶ Suitable for all water connections including tanks, pumps and service connections.
- ▶ Can be used for the connection of potable water (drinking water) appliances.
- ▶ Aquaknect was the first company to attain watermark approval for flexible connectors.
- ▶ Helps to reduce water hammer.

Specifications:

Hose diameter: 20mm

End fittings: 3/4" female hexagonal flat seat ends or with one 3/4" BSP male end.

Maximum Pressure: 2,070 kPa


Temperature range: +5°C to +65°C

Standard lengths: 300, 500, 600, & 1,000mm

Sheet Number	Version	Revision Date
QS05 Flat Seat Quickscrew series	1.00	23rd May 2011

AQUAKNECT 20mm WATER HOSE (Flat Seat End Fittings)

Product Code Prefixed QS05

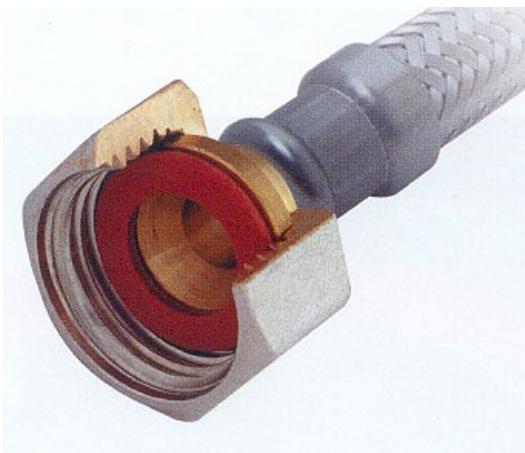

Installation:

- ▶ Avoid local bending and twisting.
- ▶ Make bend radius as large as possible in applications where there is repeated movement. Refer to our website for detailed measurements.
- ▶ Do not stretch or compress the hose.
- ▶ The installer is responsible for ensuring the integrity of the installation.
- ▶ This product is not designed for use in inaccessible locations or below ground.
- ▶ The installer is responsible for ensuring fitness for purpose and the integrity of the installation. Ensure fitment threads are clean and seals are undamaged.
- ▶ Ensure that the connector is suitable for the installation.
- ▶ Do not over tightening.
- ▶ Do not expose to corrosive agents.
- ▶ Installation should only be carried out by suitably qualified personnel in accordance with AS3500.

Approvals:

Watermark

Approval Number: Printed on ferrule

Maximum Pressure: 2,070 kPa

Diameters: 20mm NB

Temperature Range: +5C to 65°C

Standard Lengths: 300, 500, 600, & 1,000mm



Aquaknect Flexibles (A/Asia) Pty. Ltd.

15 Nestor Drive, Meadowbrook Queensland 4129

P.O. Box 3962 Loganholme Queensland 4129

Telephone: 1300 30 40 88

Facsimile: 07 3805 2990

Email: info@aquaknect.com.au

The data contained on this sheet is correct at the time of printing. However due to continuous product improvements, changes may have been made to products supplied. Please confirm specification at time of order.