



Electrical data:

Rated voltage:	240V
Mains frequency:	50 Hz
Rated output:	750W
Current:	4.5 amps
Capacitor:	15uF
Motor duty:	Continuous
Motor type:	Asynchronous, TEFC
Motor protection:	In-built thermal overload
Ingress protection:	IP 55
Insulation class:	F
Power cable length:	1.2 m H07RNF
Gross weight:	15 kg
Pump Dimensions:	383 x 158 x 375 mm (L x W x H)

2 Year Bianco Pumpz Warranty

Liquid:

Clean water temperature range: 2-50 °C

Materials:

Pump body, Diffuser, Impeller: Stainless Steel
 Mechanical seal: Carbon/Ceramic/Nitrile
 O rings: Nitrile



Installation:

Maximum ambient temperature: 50 °C
 Maximum operating pressure: 8 bar
 Pipe connections suction/discharge: 1" BSP F / 1" BSP M

The pump is a horizontal multistage pressure system pump supplied wired and ready to install. Used especially for supplying water to domestic installations.

The pump is characterised by:

- Automatic electronic pump control fitted and wired.
- Automatic electronic control provides run dry protection and constant pressure at low flows. Automatic electronic control has auto restart and in-built check valve.
- Corrosion resistant pump body, diffuser and impeller.
- Mechanical shaft seal.
- Stainless Steel barrel union
- Comes complete with plug and play leads.
- 240V single phase TEFC motor with in-built auto reset thermal overload.
- Flows to 94 l/m
- Heads to 58m

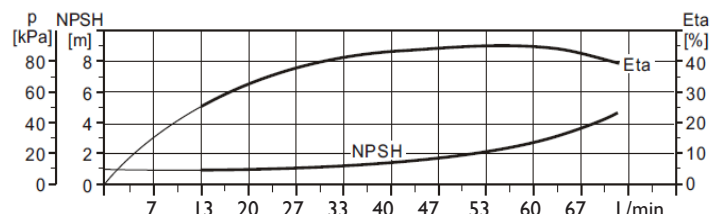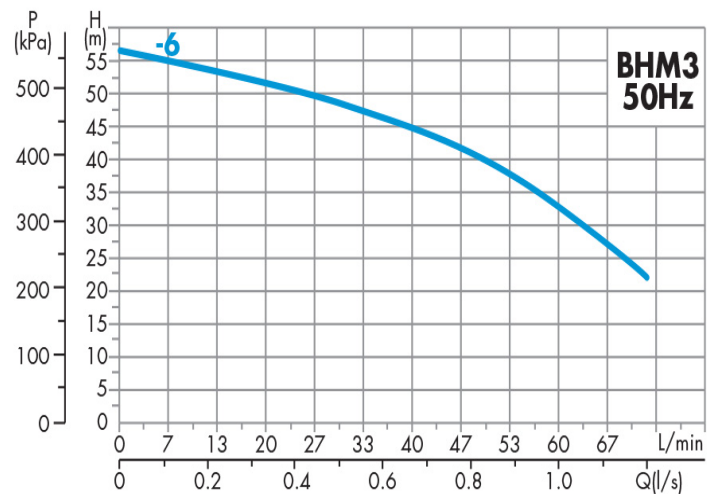

Also available:
 BHM3-4MPCX, BHM5-4MPCX,
 BHM5-6MPCX

