

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

805145

Model :

DAB-S4E17SOL

Inverter application : Allowed - min. 30Hz

Pump data

 MEI \geq 0,40

P2 nominal requested : 2.2 kW

Min. fluid temperature : 0 °C

Max. fluid temperature : 40 °C

 Max. Permitted amount of sand : 300 g/m³
Requested data

Flow : 0 l/min

Head : 0 m

Fluid : Water

Fluid Temperature : 20 °C

 Density : 0.99819 kg/dm³

 Kinematic viscosity : 1.0004 mm²/s

Vapor pressure : 2.2045 kPa

Hydraulic data (duty point)

Flow :


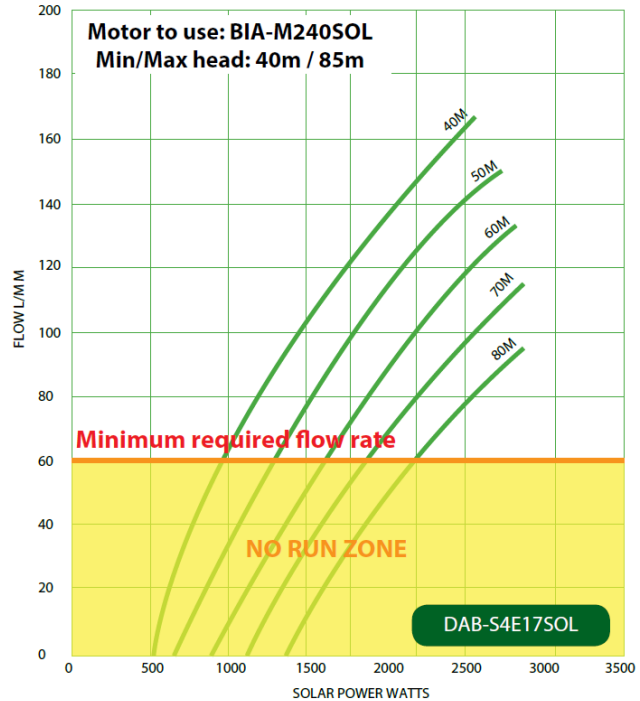
Head :

Materials

Lower support	AISI 304 microf use
Impeller	Technopoly mer A / AISI 304
Diff user	Technopoly mer A
Impeller Lock nut	Stainless steel
Cable cover	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Shaft with rotor	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Filter	Stainless steel

Motor data

Motor brand :	ICON	50 Hz
Nominal power P2 :	2.4 kW	
Rated v oltage :	90-240 V AC 90-360 V DC	
Nominal current :	12A DC	
Number of poles :	10A AC 2	
Rated speed :	2850 RPM	
Degree of protection :	IP 68	


Weight : 25.2 kg

Dimensions in mm

DNM	2" G-F				
H	2133				
Ø	99				

Pump connection

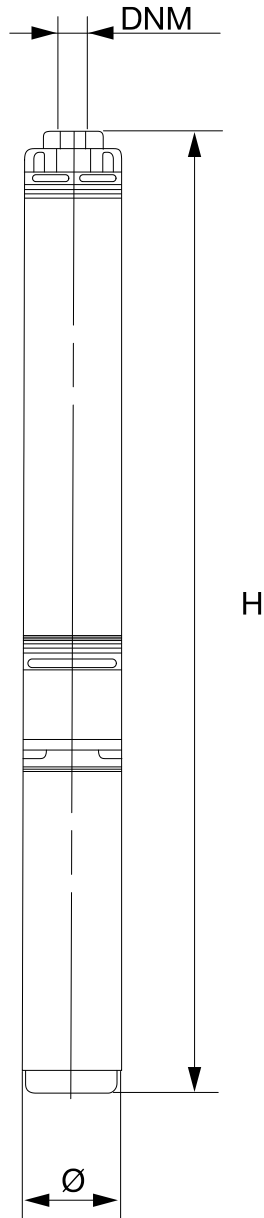
 Suction side : /
 Discharge side : 2 " G-F / --

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DAB-S4E17SOL



Dimensions in mm

1	DNM	2" G-F				
2	H	2133				
3	Ø	99				

Pump connection

Suction

Discharge
2 " G-F
--

Project

Project ID

Created by

Created on

2019-06-28