

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Motor Code :

60167638

Motor :

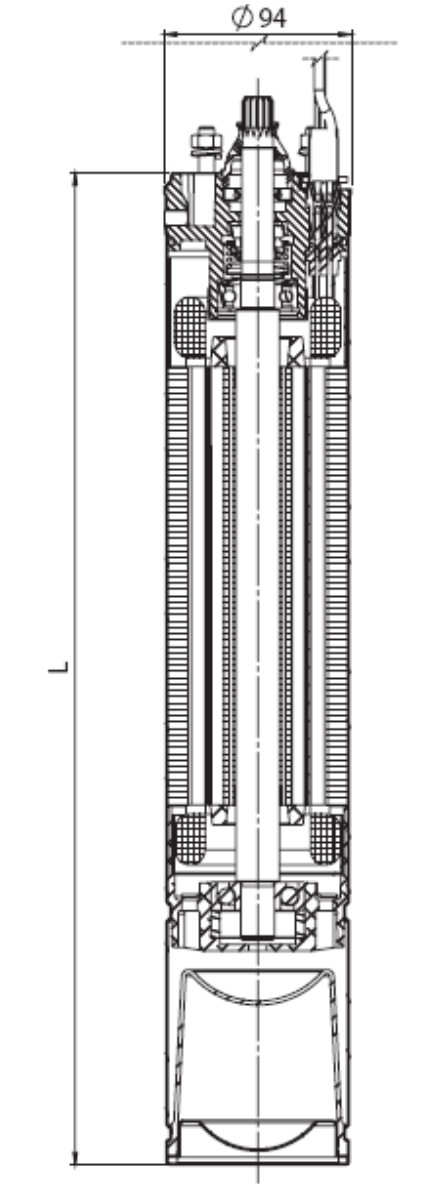
4OL 2,2 kW 400/50 460/60 T

Materials

Internal sleeve and outer casing	Stainless Steel AISI 304 L
Upper support	Nickel-plated cast iron
Shaft extension	Stainless Steel AISI 304/Duplex
Bearing cover	Stainless Steel AISI 304
Mechanical seal	Carbon/Ceramic
Gasket	NBR
Lower cover	Stainless Steel AISI 304
Bellow seal	EPDM
Dowels	Stainless Steel AISI 304
Cable	EPDM
Connector plug	Stainless Steel AISI 316
Sand guard (fixed-mobile)	NBR
Screws	Stainless Steel AISI 304
Coolant	Mineral oil

Motor data

Motor brand :	TESLA		
Nominal power P2 :	2.2 kW		
Rated speed :	2810 1/min		
Rated voltage :	3~ 400 V	50 Hz	
Nominal current :	6.3 A		
Degree of protection :	IP 68		
Inverter application :	Allowed - min. 30Hz		
Power factor :	0.71		
Efficiency :	72 %		
Cable section Ø mm ² :	4x1,5		
Cable length m :	1,7		
Cooling flow :	min. 0,3 m/s at 35°C		


Weight : 13.4 kg

Dimensions in mm

L	458				
---	-----	--	--	--	--