

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Motor Code :

60167644

Motor :

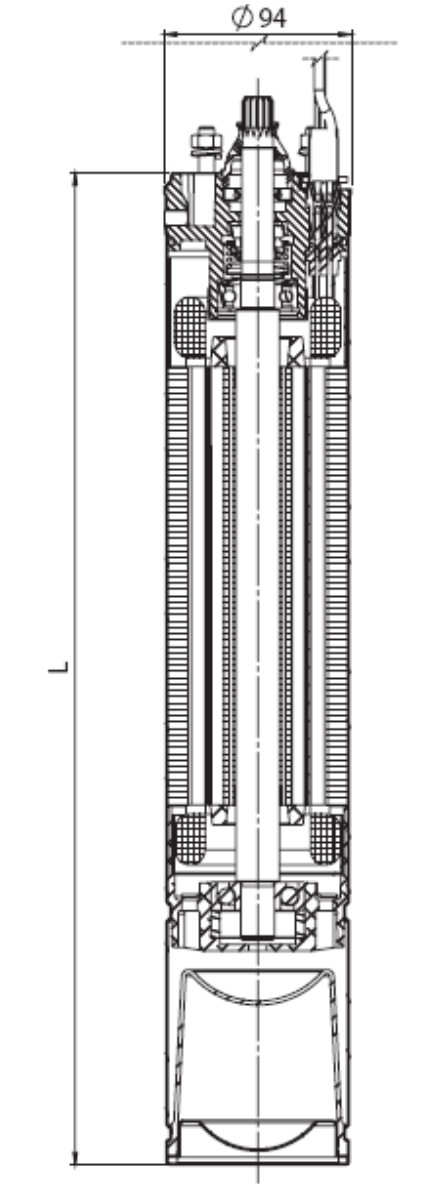
4OL 3 kW 400/50 460/60 T

Materials

| | |
|----------------------------------|---------------------------------|
| Internal sleeve and outer casing | Stainless Steel AISI 304 L |
| Upper support | Nickel-plated cast iron |
| Shaft extension | Stainless Steel AISI 304/Duplex |
| Bearing cover | Stainless Steel AISI 304 |
| Mechanical seal | Carbon/Ceramic |
| Gasket | NBR |
| Lower cover | Stainless Steel AISI 304 |
| Bellow seal | EPDM |
| Dowels | Stainless Steel AISI 304 |
| Cable | EPDM |
| Connector plug | Stainless Steel AISI 316 |
| Sand guard (fixed-mobile) | NBR |
| Screws | Stainless Steel AISI 304 |
| Coolant | Mineral oil |

Motor data

| | | | |
|-----------------------------------|----------------------|-------|--|
| Motor brand : | TESLA | | |
| Nominal power P2 : | 3 kW | | |
| Rated speed : | 2840 1/min | | |
| Rated voltage : | 3~ 400 V | 50 Hz | |
| Nominal current : | 7.9 A | | |
| Degree of protection : | IP 68 | | |
| Inverter application : | Allowed - min. 30Hz | | |
| Power factor : | 0.73 | | |
| Efficiency : | 75 % | | |
| Cable section Ø mm ² : | 4x1,5 | | |
| Cable length m : | 2,7 | | |
| Cooling flow : | min. 0,3 m/s at 35°C | | |


Weight : 15.9 kg

Dimensions in mm

| | | | | | |
|---|-----|--|--|--|--|
| L | 518 | | | | |
|---|-----|--|--|--|--|