

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

805365

Model :

DAB-S4C25SOL

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 40 °C

Max. Temperature operating :

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Lower support AISI 304 microfuse

Impeller Technopolymer A / AISI 304


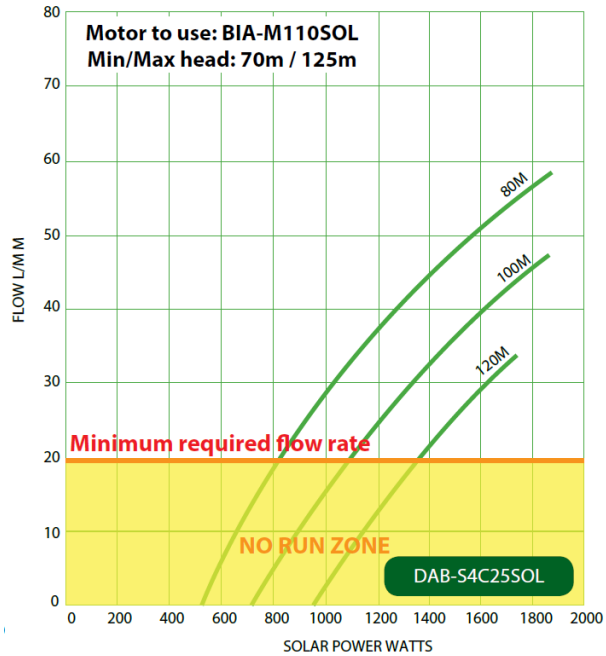
Diffuser Technopolymer A

Impeller Lock nut Stainless steel

Cable cover AISI 304 X5 Cr Ni 1810 UNI 6900/71

Shaft with rotor AISI 304 X5 Cr Ni 1810 UNI 6900/71

Filter Stainless steel


Motor data

Motor brand : iCON

Nominal power P2: 1.1 kW

 Rated voltage : 90-240V AC
 55-360V DC

50 Hz

Nominal current : 12A DC

10A AC

Number of poles : 2

Rated speed : 2850 RPM

Degree of protection : IP 68

Weight : 24.2 kg

Dimensions in mm

Dimension	Value	Unit				
DNM	1"1/4 G-F					
H	1823	mm				
Ø	99	mm				

Pump connection

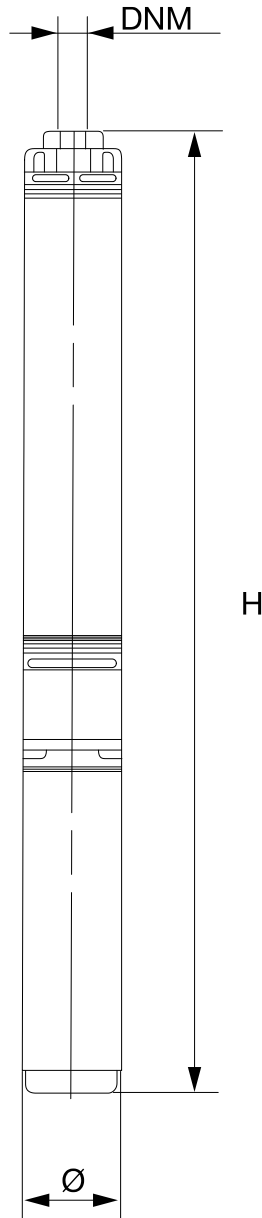
 Suction side /
 Discharge side 1" 1/4 G-F / --

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DAB-S4C25SOL



Dimensions in mm

1	DNM	1"1/4 G-F				
2	H	1823				
3	Ø	99				

Pump connection

Suction

Discharge
1 " 1/4 G-F
-

Project

Project ID

Created by

Created on

28/06/2019