

**Receiver**
**From**

 Society  
 Reference  
 Address  
 Phone  
 Fax  
 E-mail

**Item n° :**

805366

**Model :**

DAB-S4D17SOL

**Pump data**

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 40 °C

Max. Temperature operating :

**Requested data**

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

**Hydraulic data (duty point)**

Flow :

Head :

**Materials**

Lower support AISI 304 microfuse

Impeller Technopolymer A / AISI 304

Diffuser Technopolymer A

Impeller Lock nut Stainless steel

Cable cover AISI 304 X5 Cr Ni 1810 UNI 6900/71

Shaft with rotor AISI 304 X5 Cr Ni 1810 UNI 6900/71

Filter Stainless steel

**Motor data**

Motor brand : iCON

Nominal power P2: 1.1 kW

 Rated voltage : 90-240V AC  
 55-360V DC

50 Hz


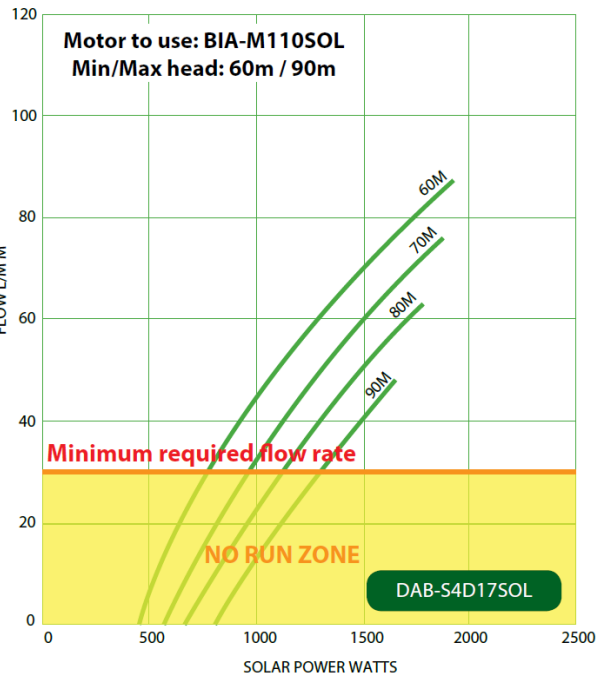
Nominal current : 12A DC

10A AC

Number of poles : 2

Rated speed : 2850 rpm

Degree of protection : IP 68


**Weight :** 18.6 kg

**Dimensions in mm**

DNM	1"1/4 G-F				
H	1473				
Ø	99				

**Pump connection**

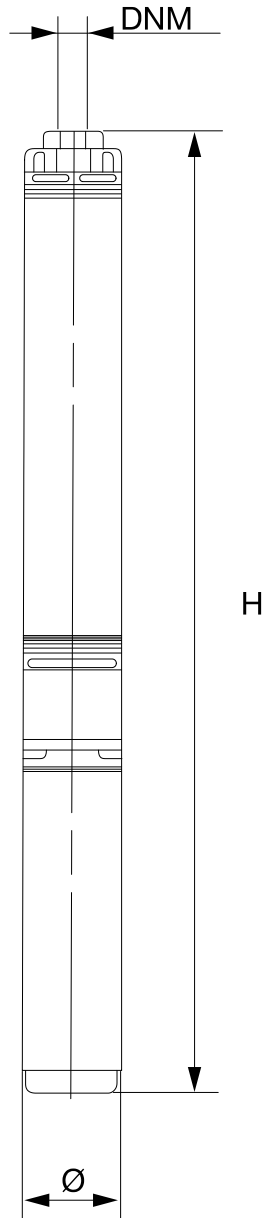
 Suction side /  
 Discharge side 1" 1/4 G-F / --

Receiver

From

Society  
Reference  
Address  
Phone  
Fax  
E-mail

**DAB-S4D17SOL**



**Dimensions in mm**

1	DNM	1"1/4 G-F				
2	H	1473				
3	Ø	99				

**Pump connection**

Suction

Discharge  
1 " 1/4 G-F  
-

Project

Project ID

Created by

Created on

**28/06/2019**