

Electronic Submersible Pump DIVERTRON




- Compact
- Integrated Automatic on/off
- Dry-run Protection
- Plug & Play
- 🇮🇹 Designed in Italy



Rope for safe installation included




Ergonomic Handle

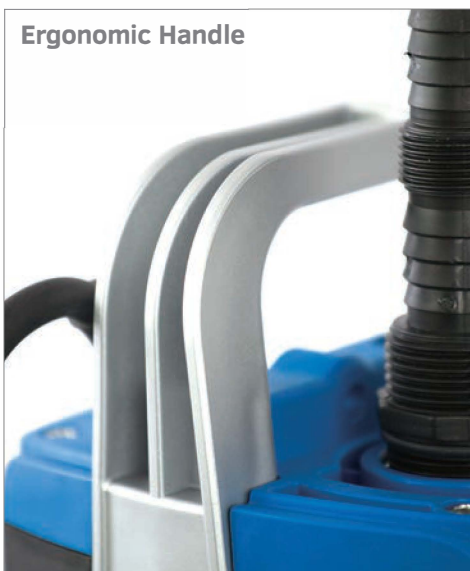

Filter



Narrow Holes

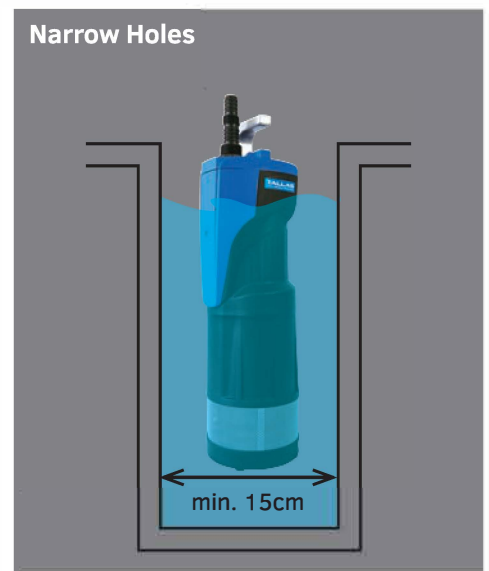

| Model | DIVERTRON C6 | DIVERTRON C7 | |
|-------------------------------|-------------------------------|------------------|------------------|
| Electrical data | P2 Pump consumption [W] | 650 | 750 |
| | Voltage [V] | 1 ~ 230 AC | 1 ~ 220-240 AC |
| | Frequency [Hz] | 50 | 50 |
| | Current [A] | 3.8 | 4.8 |
| | Capacitor μ F | 12.5 | 12.5 |
| | Capacitor Vc | 450 | 450 |
| Hydraulic data | Flow rate max. [l/min] | 95 | 95 |
| | Max. Pressure [Bar] | 3.6 | 4.6 |
| | Max. Head [m] | 36 | 46 |
| | Max. working pressure [bar] | 6 | 6 |
| | Max. Immersion depth [m] | 12 | 12 |
| | Min. submersion depth [cm] | 12 | 12 |
| | Switch-on pression [bar] | 2.6+-0.2 | 2.6+-0.2 |
| Range of use/materials | Length of Power Cable [m] | 15 | 15 |
| | Cable | H07 RNF | H07 RNF |
| | Pump International protection | IP 68 | IP 68 |
| | Insulation Class | B | B |
| | No. Impeller | 3 | 4 |
| | Liquid range Temperature [°C] | 0 °C / +35 °C | 0 °C / + 35 °C |
| | Dimension of particles [mm] | \varnothing 1 | \varnothing 1 |
| Dimensions / weight | L x W x H [mm] | 155 x 150 x 500 | 155 x 150 x 525 |
| | Ldm [mm] | 39.5 | 39.5 |
| | Hda [mm] | 450 | 475.5 |
| | DNM GAS | 1" F | 1" F |
| | Box Dimensions l x w x h [cm] | 59 x 20.5 x 25.5 | 59 x 20.5 x 25.5 |
| | Net/Gross Weight [kg] | 10 / 12 | 10.8 / 12.8 |
| | Quantity for pallet [no.] | 32 | 32 |

