



PRODUCT DETAILS

The Bianco LB530A is a manually operated, light duty, occasional use pump suitable for pumping mostly clean water with minimum soft solids or other contamination

The LB530A offers outstanding flow and head for its size and is ideal for de-watering tasks – emptying sumps and flooded areas or for transferring water from a tank, shallow well or pond.

BENEFITS

- Light weight - easy to lift and lower
- Compact and able to be employed in sumps where space is limited

FEATURES


- Automatic Operation
- Quality pump materials and construction to ensure reliable operation
- Industrial grade coating
- 10m H07RN-F Neoprene power lead and float lead
- Easy to install and use

TECHNICAL DATA

RATED POWER (W)	530W
MAX. FLOW [LPM]	250 l/min
MAX. HEAD	11m
WORKING TEMPERATURE	< 40°C
LIQUID TEMPERATURE	3°C - 40°C
MAX. IMMERSION DEPTH	7m
MAX DIA. OF PARTICLE	< 6mm
MOTOR DUTY	S1 Continuous
MOTOR PROTECTION LEVEL	Class B
MOTOR PROTECTION	In-built auto re-setting thermal overload
CAPCITOR	10 uF +/-5% 450V
MOTOR SHAFT	Stainless Steel 201

RATED VOLTAGE	220V - 240V 50Hz
RATED CURRENT	2.0A @230V
POWER CABLE TYPE	10m H07RN-F
PROTECTION CLASS	IPX8
IMPELLERS	Single Impeller
HYDRAULIC BODY	Coated AISi12
INLET STRAINER	No
OUTLET	2" DN Hose tail
MECHANICAL SEAL	Graphite Ceramic
AUTOMATION FUNCTION	Flexible Float Switch
NET WEIGHT (KG)	Pump Only 13.5kg
PACKAGE DIMENSION (MM)	220L x 220W x 340H

CURVE

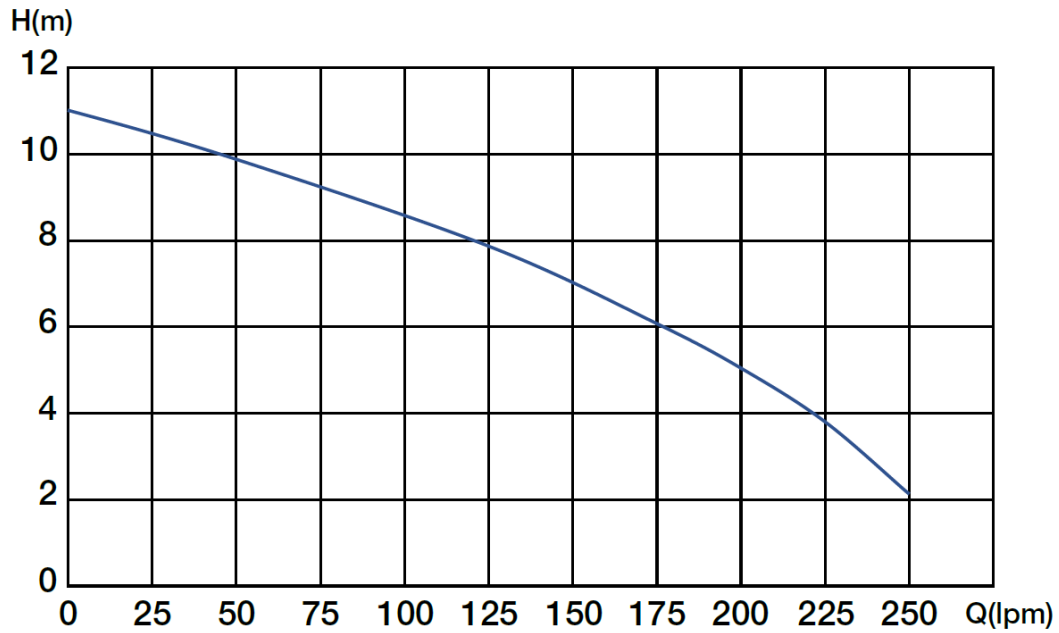

DIMENSIONS

Height


305mm high

Outlet

2" DN hose tail

Base Diameter

185mm

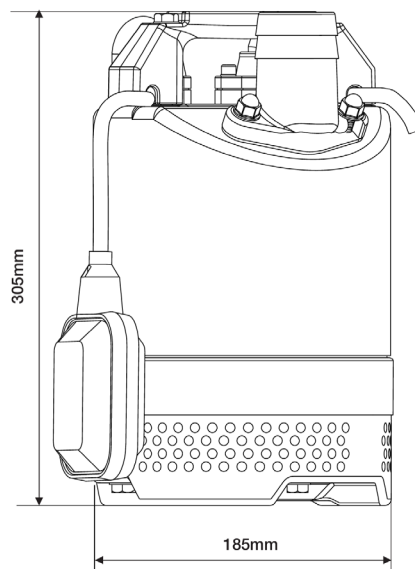

WARRANTY / CERTIFICATIONS

