

PRODUCT DATA SHEET

CLA DWA530 • 810680



BRAND



PRODUCT DETAILS

The ClayTech DWA530 is a light duty, occasional use pump with a flexible control float suitable for pumping mostly clean water with minimum soft solids or other contamination

The DWA530 offers outstanding flow and head for its size and is ideal for de-watering tasks – emptying sumps and flooded areas or for transferring water from a tank, shallow well or pond.

BENEFITS

- Light weight - easy to lift and lower
- Compact and able to be employed in sumps where space is limited

FEATURES


- Automatic Operation
- Quality pump materials and construction to ensure reliable operation
- Industrial grade coating
- 10m H07RN-F Neoprene power lead and float lead
- Easy to install and use

TECHNICAL DATA

| | |
|-------------------------------|---|
| RATED POWER (W) | 530W |
| MAX. FLOW [LPM] | 250 lpm |
| MAX. HEAD [M] | 11m |
| WORKING TEMPERATURE | < 40°C |
| LIQUID TEMPERATURE | 3°C - 40°C |
| MAX. IMMERSION DEPTH | 10m |
| MAX. DIA. OF PARTICLE | < 6mm |
| MOTOR DUTY | S1 Continuous |
| MOTOR PROTECTION LEVEL | Class B |
| MOTOR PROTECTION | In-built auto re-setting thermal overload |
| CAPACITOR | 10 uF +/-5% 450V |
| MOTOR SHAFT | Stainless Steel 201 |

| | |
|----------------------------|-----------------------|
| RATED VOLTAGE | 220V-240V 50 Hz |
| RATED CURRENT | 2.0A @ 230V |
| POWER CABLE TYPE | 10m H07RN-F |
| PROTECTION CLASS | IPX8 |
| IMPELLERS | Single Impeller |
| HYDRAULIC BODY | Coated AlSi12 |
| INLET STRAINER | Yes |
| OUTLET | 2" DN hose tail |
| MECHANICAL SEALS | Graphite/Ceramic |
| AUTOMATION FUNCTION | Flexible Float Switch |
| NET WEIGHT (KG) | Pump only 13.0kg |
| PACKAGE DIMENSION | 220Lx220Wx340H (mm) |

HYDRAULIC PERFORMANCE

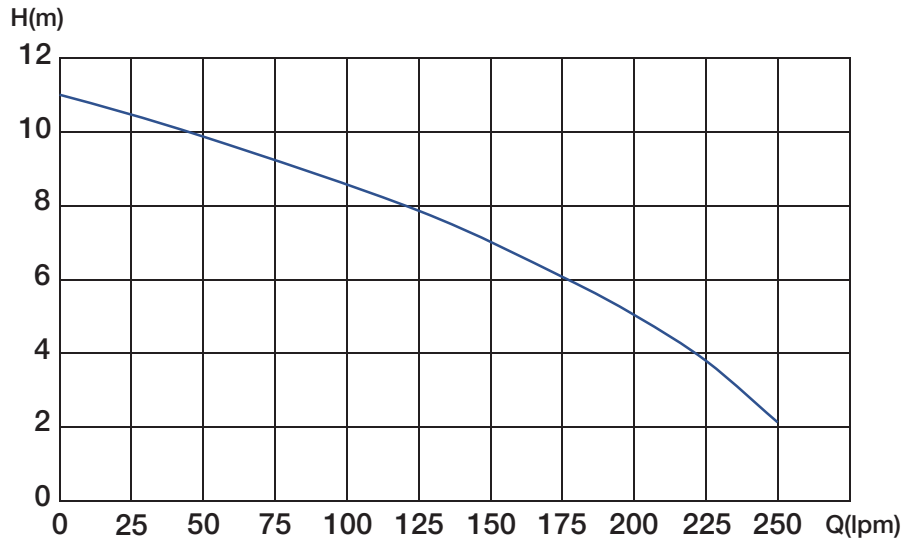


DIMENSIONS

DIMENSIONS

305 mm high

BASE DIAMETER

185 mm

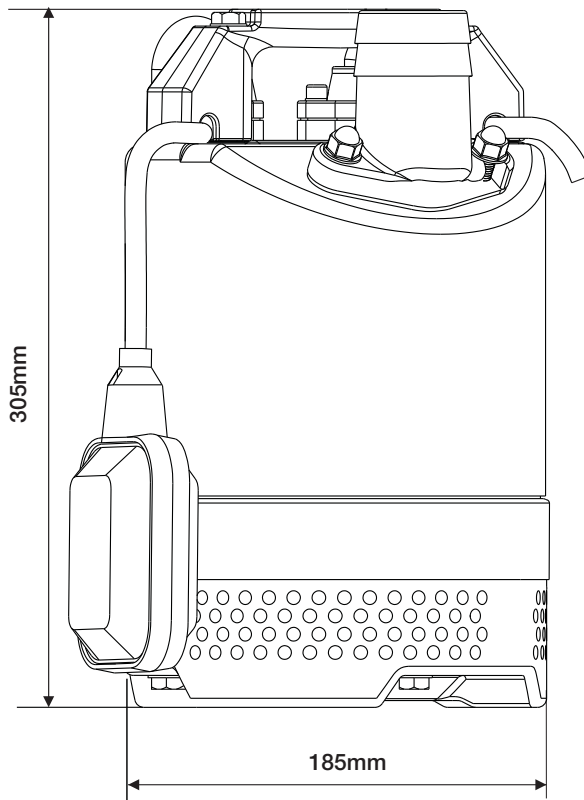

OUTLET

2" DN Hose Tail

WARRANTY / CERTIFICATIONS

