



WATER•TECHNOLOGY

TOILET

BATHROOM

KITCHEN & LAUNDRY





FULFILL ALL 3 OF YOUR WISHES

GENIX is the new DAB macerator, designed to provide the maximum level of efficiency in the 3 main moments of its lifecycle:

- Quick and Easy Installation
- Comfort in Use with Low Noise
- Clean and Simplified Maintenance

This makes **GENIX** the new benchmark in the setup of a bathroom... where you never thought it was possible.



EVERYTHING YOU NEED IS INCLUDED!

GENIX is provided with everything you need for a quick and easy installation. Fittings with integrated non-return valves, hose clamps, hose adaptors, ground-fixing screws, anti-vibration rubber nubs, and an illustrated quick guide.

Visit the website whiteint.com.au to find out more information on the Genix range.





WHEREVER YOU DESIRE









GENIX is indispensable when the wastewater coming from toilets, showers, dishwashers or sinks cannot be expelled by gravity. DAB lifting stations can be installed wherever there is the wish to add a toilet or expel greywater during new installations, renovations or new constructions.



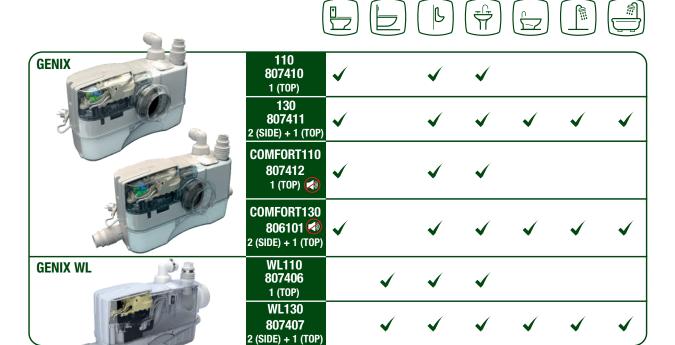



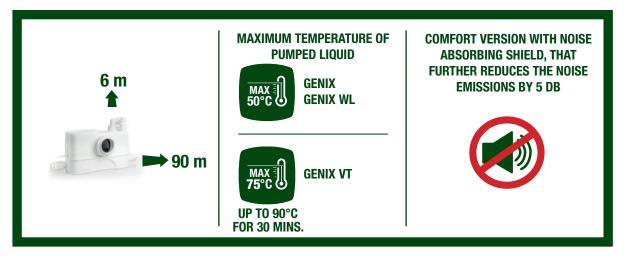








WHITE GLOVE MAINTENANCE









DRAINING TAP *draining pipe included

SILENT AND RELIABLE







SYSTEM



ACCESSORIES



ACOUSTIC ALARM 807427


To connect on the control board. It signals the condition of water above limit and non functioning motor.





FLEXIBLE HOSE ADAPTER 807426

Composed by a 500mm flexible pipe, fitting and metal clamps to adapt the GENIX installation to competitors' models having the delivery pipe on the opposite side.



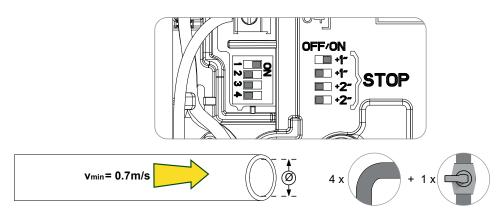

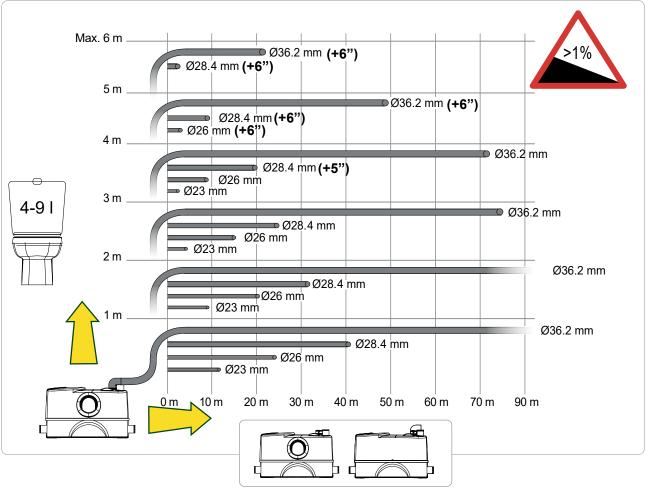

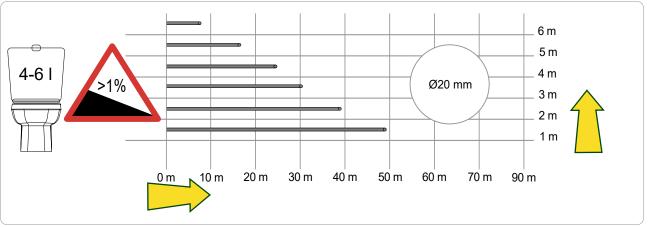



TECHNICAL DATA

	GENIX	GENIX WL	GENIX VT
Inlets	GENIX 110: 1 + 1 GENIX 130: 1 + 3	GENIX WL 110: 1 + 1 GENIX WL 130: 1 + 3	GENIX VT 010: 1 GENIX VT 030: 3
Liquid temperature range:	From 0° to +50°C.	From 0° to +50°C.	From 0° to +75°C. Up to 90°C for 30min.
Liquid pumped:	Sewage water containing fecal matter as regulated by EN 12050-3		Grey wastewater without fecal matter. The unit is designed according to EN 12050-2.
Third party certifications:	VDE-GS, LGA, VDE-EMC		
Tank capacity and delivery:	Approved for flush volumes of 6 and 9 litres as regulated by EN 12050-3		Tank volume: 10 Litres Delivery: Max. flow 130 I/min
Max. pump head:	8 metres		
Max. system head:	6 metres		
International protection grade:	IP44		
Dimensions:	456mm (L) x 178mm (D) x 277mm (H)		
Dimensions of inlet:	DN 36/40/50		
Dimensions of discharge:	DN (22/25/28/32/36/40)		
Start and stop levels:	Start: 72mm above bottom		
	Stop: 52mm above bottom		
Ambient temperature:	From +5°C to 40°C		
Noise level:	<70db(A) to 12050		
Duty class:	S3-50% 1min. (30 sec on; 30 sec off).		

Available from your local DAB distributor:

WHITE INTERNATIONAL PTY LTD

60 Ashford Ave Milperra NSW 2214 PO Box 304 Milperra NSW 2214 Phone 02 9783 6000 Fax 02 9783 6001 Customer Service 1300 783 601 Email Sales: pumpsales@whiteint.com.au www.whiteint.com.au

WHITE INTERNATIONAL NZ LTD

15G Kerwyn Avenue East Tamaki, Auckland 2013, New Zealand Phone 09 579 9777 Fax 09 579 7775 Customer Service 0800 509 506 Customer Service Fax 0800 804 344 Email Sales: sales@whiteint.co.nz www.whiteint.co.nz



Please always refer to our website for further technical information & new product innovations

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications. Product images are representations only.

Scan QR Code on your smart phone or iPad to save a digital version.

