



Brand Story



Precision has been at the very heart of Triton's philosophy since 1976, when the first Workcentre was produced. Born in Australia, Triton tools continue to be built with this philosophy at the forefront of every project. From award-winning routers and laser-guided circular saws, to the industry-renowned Superjaws and the new innovative TWX7 Workcentre, you can rely on Triton for tools that provide an accurate, quality finish every time.





Workcentre Systems

The new TWX7 brings the precision and convenience of a Triton Workcentre to a new generation. Constructed using lightweight yet robust extruded aluminium sections, supporting innovative low friction work surfaces, it remains an ideal solution for the enthusiast woodworker. Moreover the TWX7 is now both a highly capable and mobile multi-purpose workshop for professional site use. Precision and accuracy are assured, coupled with high mobility, making the Triton WorkCentre WX7 ideally suited for site trades such as kitchen or shop fitters and other finishing operations, where access to workshop facilities and accuracy ensures the highest quality results.



Easy fit modules for quick configuration



Lightweight aluminium frame folds down for portability and storage



Mains isolator switch fitted for use with power tools



Work Centre TableSturdy Construction



Workcentre Basic Execution

TWX7 LB

The TWX7 builds on the legacy of previous Triton Workcentres, with their reputation for precision, ease of use and versatility. Using the latest advanced materials technology and a new fast-change modular approach, this new system is ideal for the workshop enthusiast as well as the on-site carpentry professional.

Lightweight and robust, extruded aluminium sections support an innovative low-friction work surface and clamping table module. Duel extruded T-rails, for attaching accessories, run the full length of the table.


Fast switch-out modules transform the Workcentre between modes from bare table to router table, table saw or project saw.

Optional side and outfeed supports extend the frame for larger workpieces, whilst a rugged transit kit and folding frame bring a new level of portability to this workshop classic.







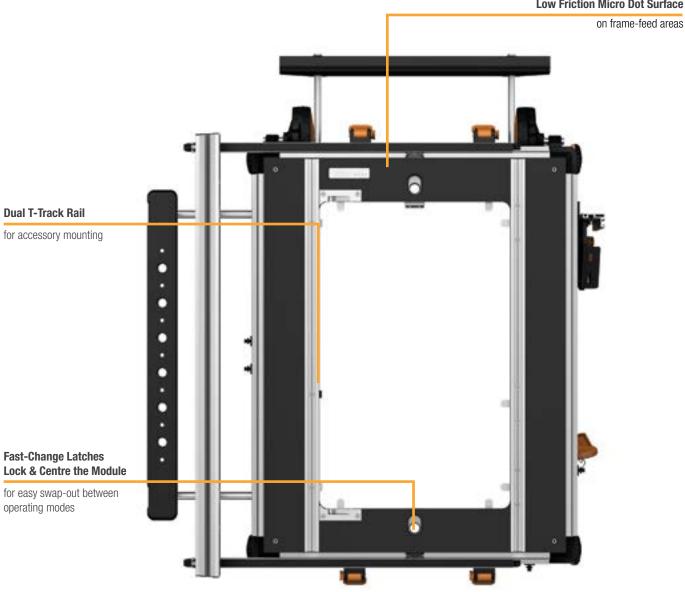

66 This is up there with the top-end German workbenches. There is no compromise here – I can't think of any features they haven't covered.


Roger Bisby, Professional Builder Magazine

Technical Specification	
Dimensions (Standing)	1036 x 737 x 900 mm (40¾" x 29" x 35½")
Dimensions (Folded)	995 x 737 x 317 mm (39¼" x 29" x 12½")
Module Insert Dimensions	660 x 410 x 50mm (26" x 161/4" x 2")
Max Load Capacity	150kg / 330lbs
Weight (Chassis Only)	23.2kg / 51lbs

Item	Part No.	Description
804680	TRI-TWX7LB	Workcentre Series Lite Bare Table

Workcentre Accessories

Taking the Workcentre to the next level, these attachments provide an all-important combination of extra support and functionality so users can focus on specific projects. Each accessory is specially designed for use with the Triton WX7 for controlled, precise operation and accurate results.

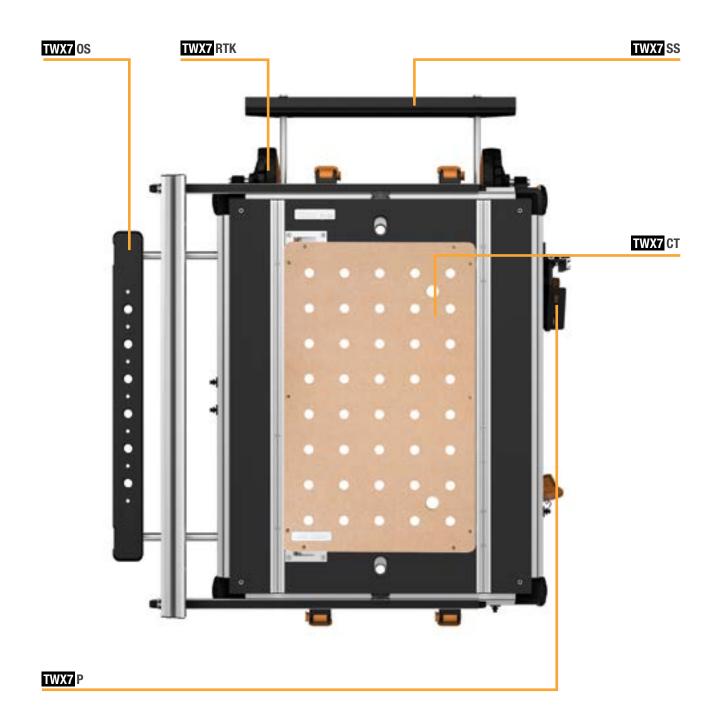

TWX7 OS

Outfeed Support



Ideal for performing rip cuts or dealing with large projects, the Outfeed Support bracket provides an adjustable reach which provides support to the workpiece.

- Chrome-plated extension bars prevent corrosion
- Outfeed support bracket supports longer workpieces
- Adjustable extension fits any workpiece to 670mm from the centre

Item	Part No.	Description
804689	TRI-TWX70S	Outfeed Support for TWX7 Workcentre

TWX7 RTK

Rugged Transit Kit



Ideal for transporting the workcentre across uneven terrain, the rugged transit kit attaches to the workcentre chassis, and is pivot mounted for user comfort. The large diameter handle mount ensures force is distributed evenly during transit.

- Large diameter wheels suitable for transit across uneven terrain
- Grooved tread pattern provides traction on a multitudee of terrains
- Wheel covers protect internal components

Item	Part No.	Description
804690	TRI-TWX7RTK	Rugged Transit Kit for TWX7 Workcentre

DCA 300 Dust Collector

Prevents sawdust filling upor clogging your vacuum cleaner. 20Ltr / 5 US gal capacity.



	Item	Part No.	Description
8	01210	TRI-DCA300	20Ltr Dust Collection Bucket

TWX7 SS

Side Support



Provides an adjustable reach which supports the workpiece. Particularly useful when dealing with large projects.

- Chrome-plated extension bars prevent corrosion
- Side support bracket supports wider workpieces
- Adjustable extension fits any workpiece up to 600mm from the centre line

Item	Part No.	Description
804688	TRI-TWX7SS	Side Support for TWX7 Workcentre

TWX7 P

Protractor Gauge



The protractor gauge provides unparalleled levels of precision when performing angled mitre cuts with the workcentre TWX7.

- Acts as angular support for complex workpiece shapes and sizes
- · Fits into Workcentre T-slot for easy installation
- Adjustable main fence and fixed 45° fences

Item	Part No.	Description
805005	TRI-TWX7P	Protractor to suit TWX7 Work Centre

TRA 001

MOF001



Routers

Designed and engineered to 'quick fit' to the Router Module, with added features to enhance its operation and accuracy.



TWX7 CT Clamping Table (Gluing Table)

MDF Clamping table with 20mm holes. Table size 850×650 mm ($33\frac{1}{2} \times 25\frac{1}{2}$ "), provides plenty of space to support project work.

Item	Part No.	Description
805003	TRI-TWX7CT	Clamping table module to suit TWX7 work centre
805004	TRI-TWX7CTFK	Clamping table fitting kit to suit TWX7 work centre



Router Table Module

TWX7 RT001


The router table module for the TWX7 Workcentre has a micro dot laminate surface, which produces minimal friction on the workpiece.


This allows it to move freely against the integral fence, and when working in freehand mode. Accuracy is assured with cruciform depth-adjustable extending face plates and micro adjusters, and safety is enhanced with the provision of both vertical and horizontal featherboards (supplied).

With a Triton Router fitted, precise adjustment is achieved with a through-the-table height winder. Close-fitting clear guards protect the operator.

The guard dust extraction point is positioned close to the cutter for maximum efficiency, working in combination with the router's own dust extraction connector under the work surface for dual extraction.

From simple edge-planing to robust panel-raising, this expert level mobile table is equally at home in the workshop or on site.

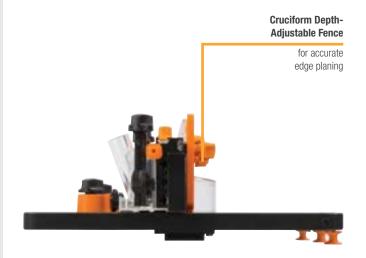

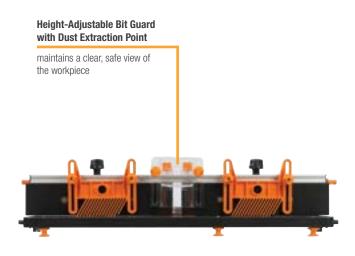



Compatible with


TRA001 – 2400W Router MOF001 – 1400W Router JOF001 – 1010W Router TWX7 – Workcentre



TRA 001 MOF 001 JOF 001

Routers

Designed and engineered to 'quick fit' to the Router Module, with added features to enhance its operation and accuracy.

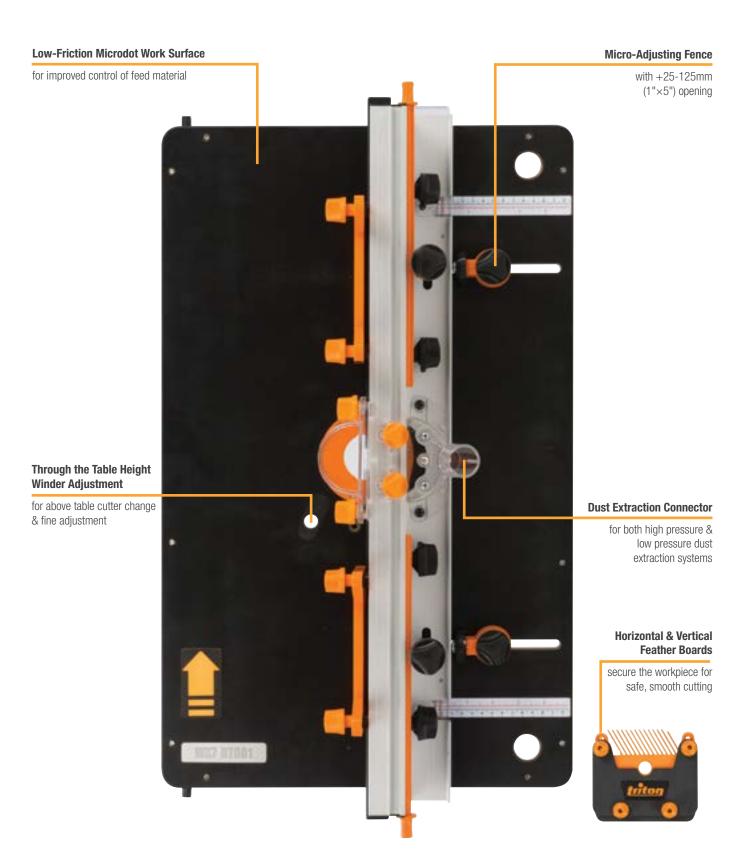

Technical Specification	
Module Size	660 x 410mm / 26¾" x 16¾"
Extruded Fence Size	680 x 85mm / 26¾" x 3¾"
Extruded Fence Thickness	21.4mm / 0 ²⁷ / ₃₂ "
MDF Fence Face Size (x2)	340 x 75mm / 13 ²⁵ / ₆₄ " x 3"
MAX MDF Fence Face Opening	90mm (3½")
Fence Adjustable Position	+25/-125mm (+1/-5")

Item	Part No.	Description
804685	TRI-TWX7RT001	Router Table Module for TWX7 Workcentre

Fence Micro Adjusters	1mm (one full revolution)
Weight	9.8kg / 22lbs
Spacer Bar Settings	0.5, 1.0, 1.5, 2.0mm
Guard Height	0-76mm / 0-3"
Featherboard Stack Height	1: 9.5mm / ¾" 2: 15mm / %6" 3: 44mm / 1¾" 4: 50mm / 2"
Maximum Throat Plate Router Bit Diameter (Dmax)	Large: 50mm / 2" Medium: 40mm / ¹⁹ / ₆ " Small: 20mm / ¹³ / ₆ "
Dust Extraction Fitting	High Pressure: 31.75mm / 1¼" Low Pressure: 62.5mm / 2½"
Weight	9.8kg / 22lbs

Contractor Saw Table Module

TWX7 CS001

At the heart of every workshop is a table saw. This has always been the starting point for the Triton Workcentre concept.

The contractor saw module brings a level of advanced precision with increased safety in a fast switch-out module for the TWX7 Workcentre.

This 'no compromise' contractor saw module provides a powerful and versatile table saw function for the Triton WX7 Workcentre.

With a cast aluminium table and a highly accurate duel locking point, fence precision cuts can be assured. The blade tilts to 45°, so bevel cuts can be made safely and easily, even with the largest sheet materials.

Enclosed guarding above and below the table and an effective anti-kickback mechanism ensures operator safety and aids efficient dust extraction.



easy to use & accurate to achieve any cut

Enclosed Guard with Above-The-Table Dust Extraction Point



for a cleaner, safer working environment





Durable Aluminium Table Surface

low friction & hard wearing



Clear Cutting Guard with Integral Dust Extraction

for operator safety and efficient dust removal



Dualpoint Locking Rip Fence with 620mm (2ft) Capacity

(either side of the table)

Technical Specification	
Power	1800W
No Load Speed	4500rpm
Blade Diameter	254mm / 10"
Bore Diameter	30mm / ¹³ / ₁₆ "
Blade Teeth	40 TCT
Bevel Range	0° - 45°

Item	Part No.	Description
804686	TRI-TWX7CS001	Contractor Saw Module for TWX7 Workcentre

Max Angle of Cut	45° - 59.5mm / 45° - 2-1/4" 90° - 86mm / 90° - 3-1/2"
Max Rip Cut Capacity	775mm / 30½"
Module Size	660 x 410mm / 26¾" x 165%"
Table with Side Extension	+600mm / + 23½"
Table with Outfeed Extension	+670mm / + 261/2"
Max Workpiece Size L x W	851x775mm
Dust Extraction Port Size	32.6mm/1¾"
Weight	15kg / 11lbs

Project Saw Module

TWX7 PS001

The majority of table saw work involves smaller components from sheet or strip materials, and the project saw module makes an ideal, very safe alternative to a full-scale table saw.

The project saw module is a professional solution for precision rip and cross cutting and trimming of hard and soft wood as well as laminate flooring, skirting and loft boards.

It can be used independently of the Workcentre in confined spaces, or fixed into the TWX7 platform for a stable surface at the optimum working height.

A die cast mitre and rip fence, together with a quick-release clamp, means you can easily achieve perfect angled cuts. With a fully enclosed blade and excellent dust extraction this is the ideal table saw for smaller projects.

Integral Carry Handle & Cable Storage

for easy portability & storage

for use independently of the workcentre

Flat Base Feet



Compatible with


TWX7 - Workcentre



TWX7

TWX7 Workcentre

Precision contractors saw module designed for use with the Workcentre TWX7, resulting in a full-featured saw table capable of professional results.

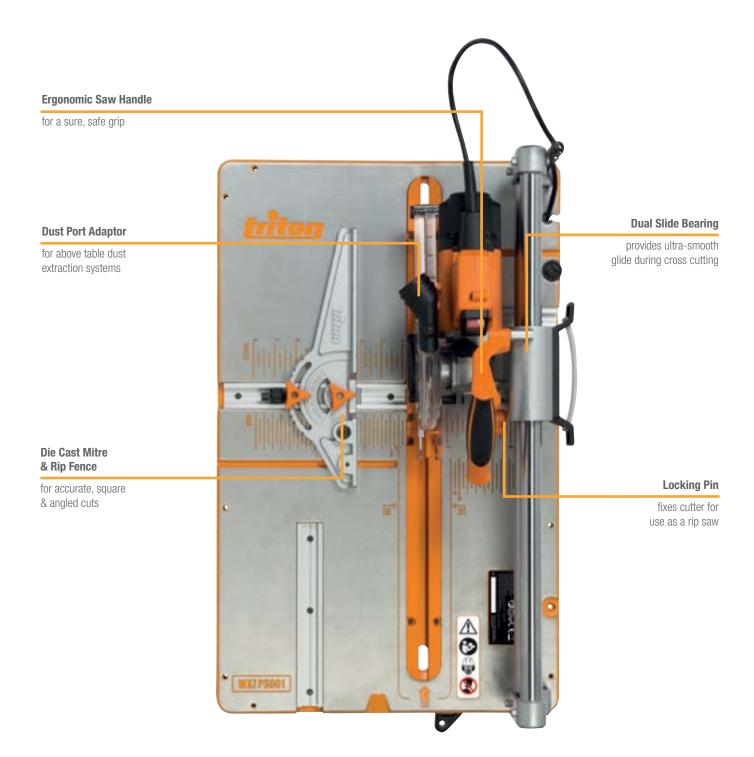

Technical Specification		
Maximum Depth of Cut	0-22mm / 0- 7/8"	
Blade Size	127mm / 5"	
Module Width	410mm / ¹⁶⁵ / ₈ "	
Module Length	660mm / 26¾"	
Max Module Depth	24.4mm / 1" approx	
Work Surface Thickness	+25/-125mm (+1/-5")	
Work Surface Material	Cast Aluminium	
Weight	10kg / 22lbs	

Item	Part No.	Description
804687	7 TRI-TWX7PS001	910W Project Saw for TWX7 Workcentre

Precision Routing

Triton Routers are quite simply the most versatile tools in the precision woodworker's armoury. Total control over the tool and the workpiece is guaranteed with patented rack and pinion depth adjustment whilst electronic speed management delivers exactly the right level of power to the cutting face. Precision engineered innovation, without compromise on performance or safety.



Dual Mode Precision Plunge Router

TRA 001 2400W

Designed by woodworkers for woodworkers, the multi-award winning TRA001 has been the benchmark in professional routers around the world since its release.

One of the most significant features of this machine is its ability to switch from a conventional plunge router to a fixed-base mode router, with rack and pinion height adjustment at the push of a button.

Simple ideas are often the best. The 3-stage, pre-set height adjustment system is a perfect example. It only takes seconds to remove the plunge return spring, which then allows for easy lifting and adjustment of the machine when mounted in a router table.

Safety has also been carefully considered, especially where bit changes are concerned. The automatic spindle lock will only engage when the power switch safety cover is closed, ensuring the tool cannot accidentally be switched on during the bit-changing procedure.




Micro Winder

enables continuous fine depth adjustment through the full plunge range



provides the perfect speed for all cutter types





Item	Part No.	Description
804900	TRI-TRA001	Dual Mode Precision Plunge Router 2400W



Single Wrench Bit Change

through the base with the automatic spindle lock

Technica	Technical Specification		
Power	2400W		
Speed	8000 - 21,000rpm Speed Maintenance Under Load		
Soft Start	Yes		
Electronic Speed Maintenance	Yes		
Collet	½" & ¼" (EU: ½" & 12mm)		
Depth Adjustment	Winder Handle Rack and Pinion Micro Winder Conventional 'Free' Plunge		
Plunge Range	0 – 68mm / 0 - 2 ² 1/ ₃₂ "		
Dust Extraction	Yes		
Bit Changes	Through-Base, Single Wrench Action, Auto Shaft Lock		
Micro Adjustment	Infinite		
Spindle Lock	Auto		
Safety Power Switch	Yes		
Removable Plunge Spring	Yes		
Guide	Extended Baseplate with Adjustable Fence		
Weight	6.3kg / 13.4lbs		

Dual Mode Precision Plunge Router

MOF 001 1400W

Developed from the multi-award winning TRA001, the M0F001 has won many prestigious awards around the globe since its release.

Quiet, easy to control and simple to adjust, this compact machine is ideal for those looking for a router equally suited for table-mounted and hand-held use.

Soft start allows close control during hand-held use, with even greater control available by fitting the multi-function fence, which is ideal for circle cutting. Variable speed ensures the router will handle a wide variety of bits for exact shaping of material.

For table mounting, quick-fit pins are located in the base, allowing rapid fitment to the mounting plate, so the MOF001 is completely compatible with the TWX7 Router Module, RT001 and RTA300 Router Table Alike.





Item Part No. Description 804890 TRI-MOF001 Dual Mode Precision Plunge Router 1400W 803129 TRI-TGA250 12 pce Router Accessory Kit

Router Accessory Kit

- Machined & plated brass guide bushes in 8 popular sizes
- Dust chute for efficient chip extraction beneath the cut
- Compatible with Triton MOF001 & JOF001 Precision Plunge Routers

Machined, chrome-plated brass guide bushes and chrome-plated steel guide plates. Ventilated guide bushes for optimised dust extraction.

Includes 8 guide bushes (OD 5/16", 3/8", 7/16", 1/2", 5/8", 51/64", 3/4" & 30mm), alignment bush (porter cable adaptor), table spacer and 2 x M4 scrows



Technical Specification			
Power	1400W		
Speed	8000 – 21,000rpm Speed Maintenance Under Load		
Soft Start	Yes		
Electronic Speed Maintenance	Yes		
Collet	½" & ¼" (EU: ¼" & 8 mm)		
Depth Adjustment	Winder Handle Rack and Pinion Micro Winder Conventional 'Free' Plunge		
Plunge Range	0 – 59mm / 0 - ²⁵ / ₁₆ "		
Dust Extraction	Yes		
Bit Changes	Through-Base, Single Wrench Action, Auto Shaft Lock		
Micro Adjustment	Infinite		
Spindle Lock	Auto		
Safety Power Switch	Yes		
Removable Plunge Spring	Yes		
Guide	Extended Baseplate with Adjustable Fence		
Weight	4.7kg / 10.6lbs		
Include	ed Accessories		

Table Height Winder handle & Multi-Function Fence

Compact Precision Plunge Router

JOF 001 1010W

Completing Triton's range of award-winning professional routers is the JOF001 Compact Precision Plunge Router.

Light and exceptionally compact in design, the JOF001 is the ideal machine for freehand work.

With automatic spindle lock for one-handed bit changes, and micro winder for continuous fine depth adjustment through the full plunge range, this compact precision router incorporates many of the award-winning features of its bigger brothers - TRA001 and MOF001.

Quick-fit pins enable fast fitment and removal from both the TWX7 Router Module and the the Triton RTA300 Precision Router Table and the above-the-table height winder allow quick and easy fine-tuning of depth setting when the router is table-mounted.

Ideal for hand-held use, the soft start enables complete control whilst the machine powers up, and variable speed ensures the perfect speed is available for all cutter types.



Router Accessory Kit

- Machined & plated brass guide bushes in 8 popular sizes
- Dust chute for efficient chip extraction beneath the cut
- Compatible with Triton MOF001 & JOF001 Precision Plunge Routers

Machined, chrome-plated brass guide bushes and chrome-plated steel guide plates. Ventilated guide bushes for optimised dust extraction.

Includes 8 guide bushes (OD 5/16", 3/8", 7/16", 1/2", 5/8", 51/64", 3/4" & 30mm), alignment bush (porter cable adaptor), table spacer and 2 x M4 screws.



Item	Part No.	Description	
804899	TRI-JOF001	Compact Precision Plunge Router 1010W	
803129	TRI-TGA250	12 pce Router Accessory Kit	

Technical Specification		
Power	1010W	
Speed	8000 - 21,000rpm	
	Speed Maintenance Under Load	
Soft Start	Yes	
Electronic Speed Maintenance	Yes	
Collet	½" & ¼" (EU: ½" & 12mm)	
Depth Adjustment	1. Micro Winder	
	2. Conventional 'Free' Plunge	
Plunge Range	0 – 59mm / 0 - ²⁵ /16"	
Dust Extraction	Yes	
Bit Changes	Through-Base, Single Wrench Action,	
	Auto Shaft Lock	
Micro Adjustment	Infinite	
Spindle Lock	Auto	
Safety Power Switch	Yes	
Weight	3.9kg	

Table Height Winder handle & Multi-Function Fence

Included Accessories



Precision cutting performance directed by simple-to-use adjustments ensures total accuracy from Triton saws. Though lightweight and comfortable to use, the rigid framing controls the power output to deliver clean, laser-straight cuts



Precision Power Saw 235mm

TSA 001 235mm / 91/4"

Engineered to provide maximum accuracy for table mounting and hand-held use, this feature-packed, high-performance circular saw delivers power and precision for all cutting requirements.

Maximum rigidity is achieved with the strong, aluminium die-cast base, which has alignment cam location holes for easy fitting and fine tuning in Triton Saw Tables.

Smooth cutting is easily achieved with the needle and ball-bearing constructed 2000W / 3hp motor which, combined with micro angle and blade height adjustment, gives accurate and professional results every time.

The spindle lock and handy on-board spanner assist with quick and easy blade changes. The quick action bevel stops, with a highly accurate calibration scale, are convenient and provide precise settings.

Dust Extraction Port



Bevelling to 45°

with preset stops at 0°, 15°, 22.5° 30° and 45°

Micro Blade Angle Trimmer

for precise setting of saw blade angle

Base Plate

for maximum rigidity when table-mounted



For hand-held or table mounted use in Series 20000 Workcentre

Item	Part No.	Description
804887	TRI-TSA001	Circular Saw Precision

Technical Specification			
Power	2000W (3 hp)		
No Load Speed	4100rpm		
Blade	235mm		
Blade Arbor	16 or 25mm		
Bevel Adjustment	0 - 45°		
Cutting Depth	0° - 82mm 45° - 58mm		
Weight 8kg			
Included Accessories			

Rip Fence, 40 TCT blade, Blade Spanner

Precision Power Saw 184mm

TA 184CSL 184mm / 71/4"

Powerful yet lightweight, the TA184CSL hand-held saw features a powerful motor that will take on some of the toughest timbers with plenty of power in reserve.

Accurate and safe to use, the built-in laser line generator produces accurate cuts and increases productivity. Handling is also made easy with the front bail handle, which offers a greater level of control and comfort over the traditional handle design.

Aluminium alloy construction on the upper and lower guards and base ensures greater strength and durability, resulting in a significantly lighter weight tool.

For a clean, safe working environment, the dust port is fitted to the guard for easy connection to a dust extraction system, while the oversized rubber-tipped guard return lever is easy to reach and grip.







Item	Part No.	Description
804888	TRI-TA184CSL	Circular Saw Precision

Technical Specification			
Power 1800W			
No Load Speed 5000rpm			
Insulation Class	Double Insulated		
Blade Diameter	185mm / 71/4"		
Blade Teeth 24TCT			
Bevel Range 1° - 45°			
Max Depth of Cut 45° - 39mm / 45° - 117⁄₃²" 90° - 62mm / 90° - 23¾4"			
Laser	Class: 2, Wave Length: 650nm		
Weight 5.1kg / 11.2lbs			

24 TCT Blade, Parallel Guide, Pin Wrench & Hex Key, Dust Extraction Adaptor

Precision Power Saw 235mm


TA 235CSL 235mm / 91/4"

Maintaining all the key features of the TSA001 that earned the respect of so many woodworkers, the TA235CSL is host to many new features including aluminium guards and base and laser sighting.

Location holes allow easy and rapid fitment to the bevel, and height micro adjustments enable fine tuning for maximum accuracy. A rack and pinion height adjustment system has also been introduced for fast, accurate adjustments when mounted upside down in the Workcentre.

Laser sighting increases user safety, allows for faster set-up and improved accuracy. The flat motor end cap is a convenient feature, allowing the saw to be rested on the motor during blade change.

Supplied with a premium quality 40-tooth tungsten carbide-tipped (TCT) blade for smooth and accurate cuts, the TA235CSL also comes with a fitted dust extraction port for a cleaner, safer working environment.







Item	Part No.	Description
804889	TRI-TA235CSL	Circular Saw Precision

Technical Specification		
Power	2300W	
No Load Speed	4500rpm	
Insulation Class	Double Insulated	
Blade Diameter	235mm / 91/4"	
Blade Teeth	40 TCT	
Bevel Range	0 - 45°	
Cutting Depth	45° - 60mm / 45° - 2 ¾" 90° - 82mm / 90° - 31¾4"	
Laser Class: 2, Wave Length: 650nm		
Weight	7.7kg / 17lbs	
Included Accessories		

40 TCT Blade, Parallel Guide, Hex Key, Long Lower Guard Wrench, Long Blade Guard Lever

Straight Cutting

Precision cutting performance directed by simple-to-use adjustments ensures total accuracy from Triton saws. Though lightweight and comfortable to use, the rigid framing controls the power output to deliver clean, laser-straight cuts every time.



Plunge Track Saw

TTS 1400 165mm / 61/2"

The TTS1400 Plunge Track Saw is a highly versatile, feature-packed tool with easy mode selection, fast set-up and advanced safety features.

When fitted to a track, the TTS1400 delivers long, straight cuts, and the flat design of the blade housing means the saw will work right up to the edge of the workpiece – ideal for trimming doors and cutting hardwood flooring.

The mode selector allows quick change between free plunge, scribe or blade change, and cutting width indicators show the exact point at which the blade plunges into the workpiece.

Blade changing is safe and easy. The power switch locks out during the blade-changing process, and the blade is easily accessed through the blade guard without having to remove the cover.

For straight, clean, accurate cuts through any type of wood, Triton's TTS1400 Plunge Track Saw delivers a professional result every time.





Item	Part No.	Description	
804906	TRI-TTS1400	Plunge Track Saw	

Optional Accessories		
801526 TRI-TTSTP		Track Pack




1500mm Track (TTST1500) (Track supplied seperately)

	Optional Accessories				
	801519 TRI-TTS60T		Plunge track saw bladed 60T		
	801526 TRI-TTSTP		Track pack & 2 x 700m connectors		
	801525 TRI-TTST1500		1500mm track		
	801524 TRI-TTSSB		Plunge track saw bag		
	801520	TRI-TTSAS700	Adhesive strip		
	801522 TRI-TTSCB700		700mm Canvas track bag		
	801521 TRI-TTSCB1500		1500mm Canvas track bag		
801527 TRI-TTSWC		TRI-TTSWC	Work clamps		

Technical Specification			
Power	1400W		
No Load Speed	2000 - 5300rpm		
Blade Diameter	165mm / 6½"		
Bore Diameter	20mm / ²⁵ / ₃₂ "		
Bevel Range	0 - 48°		
Blade Type	60 TCT		
Depth of Cut at 90° with Track	54mm / ²¹ / ₈ "		
Depth of Cut at 90° without Track	59mm / 2 ² 1/ ₆₄ "		
Depth of Cut at 45° with Track	38mm / 1½"		
Depth of Cut at 45° without Track	42mm / 1 ² / ₃₂ "		
Weight	5.5kg / 12lbs		
Included Accessories			

Work Clamps (TRI-TTSWC)

60 TCT Saw Blade, Dust outlet Adaptor, Carbon Brush (Pair)

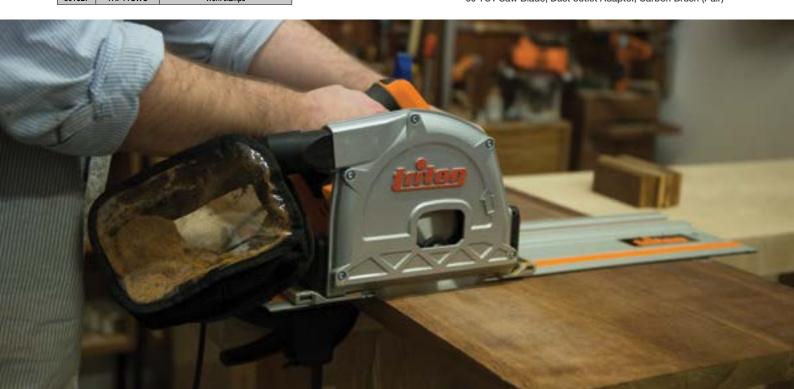

Unbeatable Sanding

A Triton Sander is a sound investment for controlled, rapid material removal. The refined feature set includes highly effective dust extraction and natural rubber grips for comfort and control over extended periods. Whatever material you are working with, the Triton sanding range has the power to deliver a smooth finish every time.



Palm Belt Sander

TCM BS 64mm / 21/2"


Slim and lightweight with a powerful 450W / 3.5A motor, the TCMBS Palm Sander is designed for single-handed use on most wood surfaces.

Delivering ample power for a high rate of stock removal across a broad range of materials, the flush side allows sanding up to the edge of the work-piece.

For confined areas or intricate projects, the small diameter front roller allows sanding in tight, awkward spaces.

Fitted with a comfortable, over-moulded grip and dust extraction port for safe, clean working, the Triton Palm Sander is designed for on-the-spot convenience and makes light work of most common sanding applications.

- Quick-release belt lever
- Sands to edge of workpiece
- Rubber over-moulded grip
- Small diameter front roller
- Belt tracking adjustment

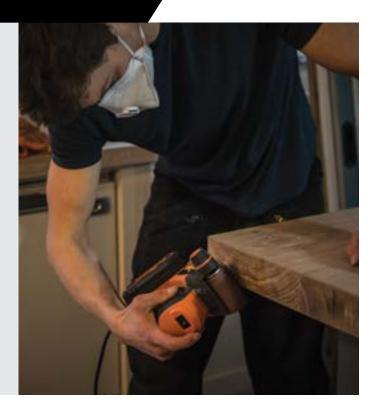



Item	Part No.	Description	
804897	TRI-TCMBS	Palm Sander 64mm 450w	
803570	TRI-TCMBSB-040	64 x 406 60 Grit	
803571	TRI-TCMBSB-080	64 x 406 80 Grit	
803572	TRI-TCMBSB-120	64 x 406 120 Grit	

Technical Specification		
Power 450W		
No Load Speed 340m/min		
Belt Size 64 x 406mm		
Weight 2.1kg		
Included Accessories		
3 v Sanding Belts 60 grit (1 fitted)		

Sanding Belts 60 grit (1 fitted), Dust Extraction Adapter

Belt Sander

TA 1200BS 76mm / 3"

Triton's TA1200BS Belt Sander is host to many significant features, from variable speed control for improved versatility, to belt tracking adjustment for accurate alignment of the sanding belt.

Fitted with a small diameter front roller ideal for sanding in awkward areas, the TA1200BS boasts a rubber over-moulded grip and removable bail handle for increased support, safety and control of the tool.

A powerful, variable speed motor drives the sanding belt at between 200 and 450m/min, complemented by the lock on button which provides convenience and comfort during extended use.

For a cleaner, safer working environment the TA1200BS is fitted with a side dust port that connects to the dust bag supplied with the machine, or can be connected to a dust extraction system.

- Powerful 1200W motor provides power for the toughest wood surfaces
- Variable speed control improves versatility
- Small diameter front roller allows sanding in confined areas
- Adjustable bail handle increases support & safety







Item	Part No.	Description	
804893	TRI-TA1200BS	Belt Sander 76mm 1200w	
804920	TRI-TBSIS	Sanding Frame to suit TRI-TA1200BS	
804916	TRI-TAS60	Belts Sanding 76 x 533mm 60 Grit 5pk	
804917	TRI-TAS80	Belts Sanding 76 x 533mm 80 Grit 5pk	
804918	TRI-TAS120	Belts Sanding 76 x 533mm 120 Grit 5pk	
804919	TRI-TAS180	Belts Sanding 76 x 533mm 180 Grit 5pk	

Technical Specification

detailed work

 Power
 1200W

 No Load Speed
 200 - 450m/min

 Belt Size
 76 x 533mm

 Actual Sanding Area
 76 x 150mm

 Variable Speed
 Yes

 Gear Casing
 Aluminum

 Weight
 4.8kg

Included Accessories

Dust Bag, Sanding Belt & Inversion Clamps

Geared Eccentric Orbital Sander

T GEOS 150mm / 6"

Equipped with a powerful 500W motor, the Triton Eccentric Orbital Dual-Mode Sander tackles the most demanding sanding and polishing tasks with ease. Variable speed control enables the tool to be used with nearly all kinds of materials, and electronic speed maintenance holds the sanding speed constant under load, giving professional results.

Features include a 150mm / 6" diameter hook-and-loop backing pad and two sanding modes. Free-run mode delivers fine, uniform sanding results with slow material removal, while forced orbit rotation mode is used for rapid material removal.

Dust is easily controlled with the highly effective vacuum dust extraction port, and the auxiliary front handle is equipped with a quick-release lever. The handles feature vibration-reducing, rubber overmoulded grips, for maximum protection and comfort.

Includes soft carrying case and various grit sanding discs, so the TGEOS can be used straight out of the box. A pair of spare carbon motor brushes is also included, providing this innovative machine with a long service life.

provides comfort & grip for extended use Free-Run Mode: Fixed Orbit Mode:

Fine sanding with low material removal

Rubber Over-Moulded Grip

Course sanding with high material removal & buffing







Electronic Speed Maintenance Under Load

Adjustable
Auxiliary Handle

adapts the tool to the job & matches operator preference

Variable Speed Control & Backing Pad Braking System

adapt to a variety of materials & prevent workpiece damage

with free-run mode for fine sanding & geared fixed orbit mode for fast material removal & buffing

Dual-Orbit Sanding Action

for increased operator safety & clean work areas

Vacuum Dust

Extraction Port



provides ample power for the most demanding sanding & polishing tasks

Item	Part No.	Description
804904	TRI-TGEOS	Orbital Sander

	Technica	I Specification
	Power	500W / 4.5A
The contract of the contract o	No Load Speed	2500 - 6250rpm
	PlatePad Diameter	150mm / 6"
	Orbit Eccentricity	5mm / 3/16" Random or Forced
	Adjustable Bail Handle	Rotating & Swivel
	Sanding Disc	Hook & Loop
	Power On Neon	Yes
10	Sanding Modes	Dual (Random & Fixed Orbit)
	Weight	3.1kg / 6.8lbs
11/2	Include	d Accessories
		se, 6 x Sanding Discs e Carbon Brushes

Accurate Jointing

Dowel jointing provides a swift and secure solution for simple joints. A Triton jointer can effortlessly reproduce consistently accurate joints in a variety of materials. Calibrated rules and an innovative rack and pinion movement help maintain precision, allowing you to dial in the required angle and depth for simultaneous, synchronised pockets.



Duo Dowel Jointer

TDJ 600 710W


Offering precise control of height, depth and angles, the TDJ600 Duo Dowel Jointer drills two holes at 32mm centres in a single action.


Quick, accurate adjustment of material thickness is easy with the rack and pinion mechanism, whilst the clear, calibrated viewer enables precise set-up and execution.

Ideal for forming strong, reliable, edge-to-edge and mitre corner joints, the Duo Dowel Jointer creates accurately spaced joints along the length of the workpiece.

Anti-slip pads help prevent movement during the drilling process to ensure fast, reliable jointing.

Motor housing can be easily removed to replace worn carbon brushes and dust port allows connection to an extraction system for a clean, safe working environment.

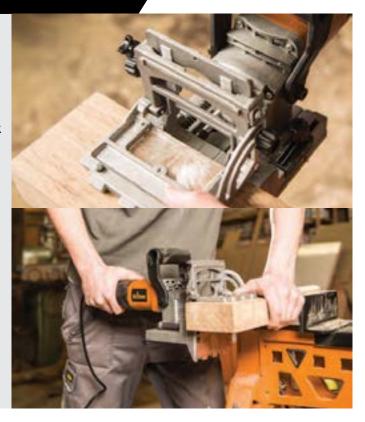

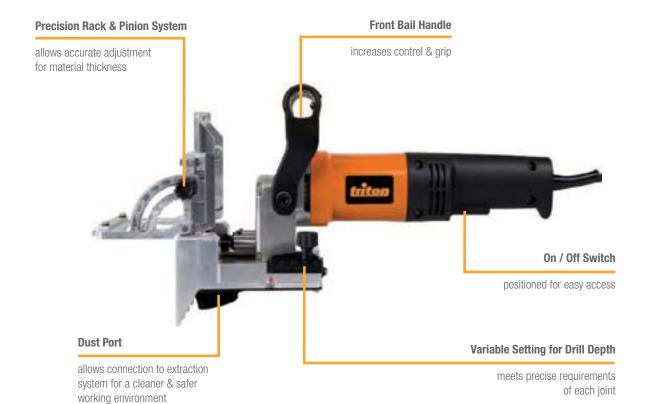

Item	Part No.	Description
804898	TRI-TDJ600	Duo Dowel Jointer 710W
804926	TRI-TDJDB	Dowel Jointer Bits 8mm
803496	TRI-TDJDB	Dowel Jointer Bits 10mm

lechnical Specification		
Power	710W / 5A	
No Load Speed	17,000rpm	
Drilling Height	9 - 43mm / ²³ / ₆₄ - 1 ¹¹ / ₁₆ "	
Drilling Depth	0 - 38mm / 0 - 1½"	
Drill Bit Spacing 32mm / 11/5"		
Weight 2.8kg / 6.1lbs		
Included Accessories		
2 x 8mm / 3/8" dia drill bits,		

Dust Port Adaptor, Hex Key



Innovative Planing

Patented triple-blade planing technology is a unique feature of the Triton range. The additional cuts achieved with each revolution greatly improve the finish and reduce long-term wear on the tool. Other innovations, such as positioning the motor above the blade, greatly improve the air flow, allowing high volumes of shavings to be ejected cleanly. Calibrated depth control and ridged guide fences ensure total accuracy and precise finishing.

Compact Palm Planer

TCM PL 420W


The TCMPL Compact Palm Planer is powerful, easy to handle, and includes all the features of a conventional-sized planer and more.

Utilising twin 60mm solid TCT blades, the TCMPL offers the perfect combination of power and balance with excellent grip for safe, one-handed operation.

The 420W / 3.5A motor and 60mm planing width make this planer ideal for fast material removal on small to medium-sized workpieces.

Up to 1.5mm of material can be removed in one pass, and the adjustable planing depth with 3 bevelling grooves ensures flatness and improves cutting accuracy.

A power lock-off switch prevents accidental operation, and the foldaway blade protection foot prevents damage to the blades when the planer is resting on a surface.

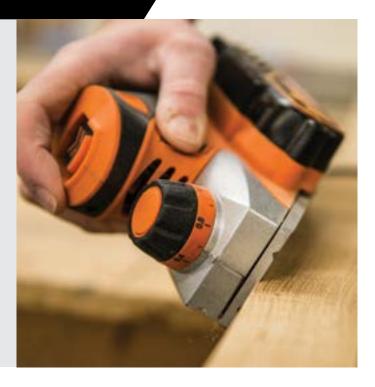

Slim Handle Design Rubber Over-Moulded Grip is easy to hold & control increases control & safety using one hand **Parking Stand Stepped Depth Control**



protects the blades & workpiece from damage on run down





Item	Part No.	Description
802734	TRI-TCMPL	Compact Palm Planer
803567	TRI-TCMPLB60	60mm Planer Blades, Pkt of 2

Technical Specification		
Power 420W / 3.5A		
No Load Speed	13,000rpm	
Planing Depth	1.5mm / 1/16"	
Planing Width	60mm / 23/8"	
Blade Type	2 x Reversible 60mm HSS /	
	2 x Reversible 2¾" HSS	
Weight	2.4kg / 5.3lbs	
Optional Accessories		
TCMPLB60	60mm / 23/8" Planer Blades x 2	

Unlimited Rebate Planer

TRP UL 82mm 750W

The TRPUL's patented triple-blade drum delivers an impressive 46,500 cuts per minute for fast material removal and a superior finish to every project.

Traditionally the rebate depth for any planer is restricted by body design, however the TRPUL is designed with the blade drum positioned to the outermost edge, allowing unrestricted depth rebates right to the edge of the workpiece.

In addition, the removable blade drum system allows fitment of the sanding drum (both included) to convert the planer into a highly efficient sander.

With the high mount position of the motor improving airflow, chip extraction is maximised via the selectable left or right rear dust extraction, ensuring sawdust is directed away from the operator and workpiece at all times.

Power-On Neon

increases operator safety



Left or Right Rear Dust Extraction

allows the dust/chips to be directed either side of the workpiece

Variable Speed Control

adjusts the drum speed to suit the material



Spindle Lock Button

for easy drum changes

Patented 3-Blade Drum

provides a higher rate of material removal (46,500 cuts per minute)

Parking Stand

protects the blades & workpiece from damage on run-down



Item	Part No.	Description
804894	TRI-TRPUL	Unlimited Rebate Planer
803566	TRI-TRPPB	HSS Planer Blades Pkt 3 to suit TRI-PUL
804921	TRI-TRPSS	Sleeve sanding 80g to suit TRI-PUL



Technical Specification		
Power	750W / 6.5A	
Variable Speed	5000 - 15,500rpm	
Cuts Per Minute	46,500	
Planing Depth	0 - 3mm / 1/8"	
Planing Width	82mm / 31/4"	
Blade Type	3 x Reversible HSS	
Weight	2.4kg / 5.3lbs	

Included Accessories

Sanding Drum with Sanding Sleeve, Planing Drum (HSS 3 Blade), Wrench and Hex Spanner, Dust Bag and Adaptor, Guide Fence

Triple Blade Power Planer

TPL 180 180mm / 7"

The TPL180 Triple Blade Power Planer features a huge 180mm / 7" width for heavy duty planing of the toughest wood surfaces.

Packing twice the power of conventional planers, the 1500W / 12.5A motor delivers precise material removal and a superior finish.

The revolutionary 3-blade drum delivers a massive 45,000 cuts-per-minute, improving balance, reducing vibration and blade wear, increasing the speed of cut, and producing a smoother finish.

A low centre of gravity design means this large, powerful machine is easy to control, whether on wide or narrow planing surface areas, and the dust extraction port easily connects to a dust extraction system for a cleaner, safer, working environment.



Power-On Neon

indicates a live power connection

Dust Port

for connection to a dust extraction system



Powerful 1500W Motor

for heavy duty planing of the toughest wood surfaces

> **Revolutionary 3-Blade Drum Design**

for faster, smoother cuts & a superior finish



0 - 2mm / 0-3/32" cut d	lepth
plus parking setting	

Technical Specification		
Power	1500W / 12.5A	
No Load Speed	15,000rpm	
Cuts Per Minute	45,000	
Planing Depth	0 - 2mm / 3/32"	
Planing Width	180mm / 7"	
Blade Type	3 x Reversible 180mm / 7" 65Mn	
Weight	8.2kg / 18.7lbs	

Wrench, Dust Bag, Dust Connector, Guide Fence, 3 x Reversible 65Mn blades

Item	Part No.	Description
804892	TRI-TPL180	Triple Blade Planer
803561	TRI-TPI 180PB	180mm planer blades. Pkt of 3 to suit TRI-TPI 180

Bench Top

In the workshop or on site, Triton Bench Top tools extend your woodworking capabilities. Projects get off to a better start with super-smooth stock, and a higher standard of finish is achieved when stock is cut precisely with a razor-sharp edge. Solidly constructed, with a wealth of accessories to extend functionality, you can expect years of reliable service from Triton's Bench Top tools range.



Planer / Thicknesser

TPT 125 317mm / 121/2"

Offering the full 317mm cutting width, the TPT125 Planer / Thicknesser delivers 17,500 cuts per minute for a high quality, consistently smooth finish to the workpiece.

Large infeed and outfeed tables provide added material support for long workpieces and a capacity for timber from 3.2mm up to 152mm depth.

A circuit breaker ensures enhanced electrical safety and the dust chute, which can be mounted on either end of the thicknesser, provides a cleaner, safer, working environment.

Precise setting of the cutting depth is easy with the graduated depth crank handle and clear, easy-to-read thickness scale. The 4-post column design provides rigidity and allows the cutter head to be raised and lowered smoothly and accurately for precise results.



Easy-to-Read **Crank Handle Thickness Scale 4-Post Column Design** for precise setting for easy movement for rigidity & accuracy of the roller case of cutting depth in setting depth of cut Easy, accurate setting of cutting depth in 1.58mm / 1/16" increments **Cutter Height from Locating Holes** 3.2 - 150mm / 1/8" - 6" for secure for maximum versatility bench mounting **Quick Access Brushes**

allows changing of worn brushes

Item	Part No.	Description
804886	TRI-TPT125	Planer/Thicknesser
803560	TRI-TPTPB	Spare blade planer thicknesser HSS 317mm reversible 2pkt

Technical Specification		
Power	1100W / 1½hp	
Cuts Per Min	17,500cpm	
Planing Depth	3.2 - 152mm / 1/8" - 6"	
Planing Width	317mm / 12 ½"	
Table Size	317 x 320mm / 12½" x 12 ³⁹ / ₆₄ "	
Weight	29kg / 64lbs	

Oscillating Spindle Sander

TSPS 450 450W

Triton's Oscillating Spindle Sander offers outstanding performance and a precise finish to every wood working project.

Stability and enhanced material support for larger stock is provided by the cast iron table. The oscillating action moves the drum up and down during rotation, reducing the static friction that causes burning, and eliminating band marks. It also extends the life of the sanding sleeve by spreading the wear across a broader surface.

Supplied with six sanding sleeves with matching rubber drums and table inserts, the Triton Oscillating Spindle Sander is well equipped to provide a professional finish to internal as well as external profiles. This also allows the matching of the optimum size of sleeve for the precise needs of each woodworking project.





Item	Part No.	Description
804895	TRI-TSPS450	Oscillating Spindle Sander 450W
801502	TRI-TSS60G	6pc Sleeves 60 Grit
801503	TRI-TSS80G	6pc Sleeves 80 Grit
801499	TRI-TSS100G	6pc Sleeves 100 Grit
801500	TRI-TSS150G	6pc Sleeves 150 Grit
801501	TRI-TSS240G	6pc Sleeves 240 Grit

Sanding Sleeves

- Sizes 13, 19, 26, 38, 51 & 76mm
- Length 115mm
- Aluminium oxide



	Technical Specific	Technical Specification	
A CONTRACTOR OF THE PARTY OF TH	Power	450W	
	No Load Speed	2000rpm	
THE RESERVE TO SERVE	Oscillations	58opm	
411	Table Size	370 x 295mm	
	Dust Port	38mm	
	Weight	12.9kg	
	Included Accessories		
	6 x Aluminium Oxide Sanding Sleeves from 13 - 76mm, 6 x Table Inserts, 5 Rubber Sanding Drums, 3 x Upper Spindle Washers & 1 x Wrench		

Wetstone Sharpener

TWS S10 120W

Fitted with a pre-dressed, high-grade grindstone and leather honing wheel, the Triton Wetstone Sharpener produces a polished, razor-sharp edge on cutting and shaping tools.

Used in conjunction with the supplied honing compound, the leather honing wheel delivers a finely polished finish, ideal for hand tools, knives, plane irons, chisels and other wood carving tools.

Edges won't overheat or lose their sharpness due to the water-cooled, slow speed of the wetstone sharpener. Using the support arm, angle guide and jig, it is easy to shape and sharpen a blade precisely to the angle required.

Pre-dressed and ready for use, the high-grade diamond grindstone can be easily and quickly re-dressed with the provided stone grader. The 120W induction motor provides long-lasting, smooth performance and rubber feet keep the machine steady and minimise vibration for a perfect finish.



Water Trough

keeps the stone wet & the grinding surface cool, preventing overheating



Vertical Mounts for Support Arm

for perfect positioning of the blade for sharpening







Technical Specification		
Power	120W / 1A	
No Load Speed	2800rpm	
Wheel Speed	125rpm	
Bore Diameter	Ø 12mm / Ø ¹⁵ / ₃₂ "	
Sharpening Stone Size	Ø 250 x 50mm 220 Grit / 10" x 2" 220 Grit	
Honing Wheel	Ø 230 x 30mm / 9 x ¹³ / ₁₆ "	
Weight	14.5kg / 29lbs	





Item	Part No.	Description
804891	TRI-TWSS10	Wetstone Sharpener

Wetstone Sharpener Optional Accessories

TWS S10

Expand the functionality of the Wetstone Sharpener with a choice of products for honing, sharpening and polishing virtually every kind of

Precisely designed and engineered specifically for use with the Wetstone Sharpener, the range also includes accessories to keep the sharpener in peak condition for a quality performance on every project.



804698

For sharpening an assortment of tools, especially tools requiring larger bevel angles. Provides stable platform.



Long Knife Jig

For long or thin flexible filleting knives. The broad clamping head holds blades securely.



TWS DTT

Diamond Truing Tool

Quick restoration of the grinding surface. The back bar controls rate of material removal.



TWS SG

804692

TWS TGJ

804700

Stone Grader

For dressing the grinding stone. Course 220 Grit Fine 1000 Grit



Turning Gouge Jig

For controlled, accurate sharpening of woodturning tools.



TWS GAJ

804693

Grinding Angle Set-Up Jig

For setting up the correct angle for sharpening. Enables repeated accurate grinding of specific bevel angles.



804701

Plane Camber Jig

Puts an even, slight radius onto a hand plane iron, especially good for scrub and jack plane irons. Camber for improved shearing action.



804694

Scissors Jig

Restores sharp edges to blunt scissors and garden shears. Twin clamps for securing blades.



TWS SEJ

804702

Straight Edge Jig

Maintains correct sharpening angle. Easy, accurate tool fitting.



TWS SAE

804695

Support Arm Extension

Attaches to support arm. Provides simultaneous tool support above the grindstone and honing wheels.



TWS DW

804703

Pre-Dressed Coated Grindstone

High-grade grindstone that sharpens steel edges efficiently and reliably.



TWS CTJ

Carving Tool Jig

804696

For accurate sharpening of carving tools and other short tools. Clamps narrow and butt chisels firmly. Internal 'V' shape automatically centres the tool.



804704

Machine Cover

Keeps dust and dirt off the Wetstone Sharpener when not in use.



TWS LHW

804697

Profiled Leather Honing Wheel

For honing and polishing the inside of turning and woodcarving gouges. Honing/ polishing V-parting tools. Made from solid



805000

Metal Polish

For dressing the leather honing wheel.



Work Support

Whenever you need an extra pair of hands - from supporting timber for cutting logs, clamping a door for trimming, storage of timber stock, or protecting your tools and materials for transport - Triton Work Support products have the solution.



SuperJaws Clamping System

SJA 200

The iconic SuperJaws can be easily transported right to the job, whether indoors, outdoors or the workshop floor.

SuperJaws provides fast, hands-free clamping of material up to 956mm, and a massive clamping force of up to 1000kg.

Constructed from tough, powder-coated steel, SuperJaws will hold anything - from car parts and bicycles to timber and tubing.

Features include a lock / release switch for fast release of the workpiece, and reversible jaws for extra-wide clamping capacity.

Technical Specification		
Clamping Range	0 - 956mm / 0 - 37 ⁴ 1/ ₆₄ "	
Clamping Force	Up to 1000kg / 2200lbs	
Clamping Method	Foot Operated	
Standard Jaws	Urethane	
Max Load	100kg / 220lbs	
Folded Size	745 x 278 x 300mm / 29 ²¹ / ₆₄ " x 10 ¹⁵ / ₁₆ " x 11 ¹³ / ₁₆ "	
Standing Size	970 x 960 x 860mm / 38 3/6" x 37 5/64" x 33 55/64"	
Weight	15kg / 33lbs	
Included Accessories		

Rip Fence, 40 TCT blade, Blade Spanner



Finishing



Wood Working



Engineering



Log Cutting

Item	Part No.	Description
801269	TRI-SJA200	SuperJaws MK2

SUPERJAWS



Accessories

Log Jaws

- Strong jaws for working on logs & poles up to approx 300mm dia
- Ideal for chainsawing, drilling, fastening or carving work
- Serrated teeth prevent slippage or rolling
- Fits easily on SuperJaws in place of the standard urethane jaws
- Steel plate & zinc-plated for corrosion resistance
- Compatible with all Superjaws



Item	Part No.	Description
801321	TRI-SJA460	Log And Pole Gripping Jaws

Engineers Jaws

- Shaped for increased grip on metal bars, tubes and piping up to 50mm dia.
- Tough cast iron jaws & anvil face for heavy duty metal work
- Easy to fit & remove
- Compatible with all SuperJaws



Item	Part No.	Description
801322	TRI-SJA470	Cast Engineers Jaws

Tool Tray / Work Support

- Provides extra support for large work-pieces
- Keeps tools, spare parts or other items conveniently to hand
- Robust & hardwearing
- Easy to fit & remove
- Compatible with Superjaws SJA200



Item	Part No.	Description	
801320	TRI-SJA420	Tooltray Comb Side Support	


Multi-Stand

MSA 200

Multi-purpose, adjustable support stand with extra-wide tripod base for excellent stability on level or uneven ground. Folds down in seconds for convenient transportation and storage. Swivelling and tilting head with built-in clamp and low-friction slide surfaces.

- Swivelling & tilting head with built-in clamp & low-friction slide surfaces
- Secures work at almost any angle & supports up to 100kg
- Height adjusts from 635 940mm
- Extra-wide tripod base for stability
- Folds flat for easy storage



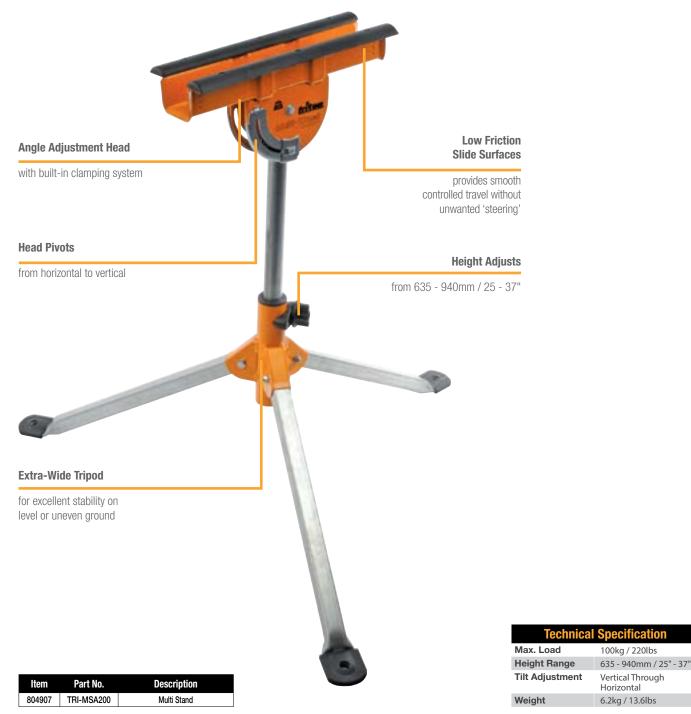

Woodrack Storage System

WRA 001

Triton WoodRack is easy to install, providing generous storage for wood, piping, guttering and long metal pieces on six levels, each with a capacity of 50kg.

- Provides generous storage for timber, pipes etc.
- For internal or external use
- Ideal for workshops, garages, sheds, fences, walls etc.
- 12 supports provide 6 levels of storage 50kg per level
- Robust powder-coated steel tubing



6 Levels for storage of all materials **Generous Storage Capacity** for timber, pipes & other long items Made from 30mm **Steel Tubing** & powder coated for increased durability & life Holds 50kg / 110lbs

of material per level

Technical Specification		
Max. Load	Holds 50kg / 110lbs of Material Per Level	
Depth	300mm / 12"	
Height	1040mm / 41"	
Tube Size (upright)	25 x 1.6mm in Mild Steel / 1 in/sq x 1/16" in Mild Steel	
Tube Size (racks)	30 x 1.6mm in Mild Steel / 13/6 in/sq x 1/6" in Mild Steel	
Weight	7.8kg / 17lbs	
Included Accessories		

12 x Racks, 12 x End Caps, 12 x 6g x $\frac{1}{4}$ " Pan Head Screws, 2 x Uprights, 6 x Spacers

Precision Router Table System - Series 2000

RTA 300

Quick installation of any Triton Router is easy with the Precision Router Table System, Featuring slots on the mounting plates and including quality, heavy duty fittings, almost any 1/4" or 1/2" Router can be installed.


By adding other accessories, the system will perform jigsaw cutting, biscuit jointing and finger jointing.

Fitting the Triton Router Table (RTA300) to the Triton Workcentre or Router Stand adds a whole new dimension to woodworking, allowing shaping, planing, rebating, trenching, moulding and grooving.

Whatever the job, the Triton Router Table offers remarkable accuracy, exceptional versatility and enhanced safety for professional results.



Non-Return **Pressure Fingers**

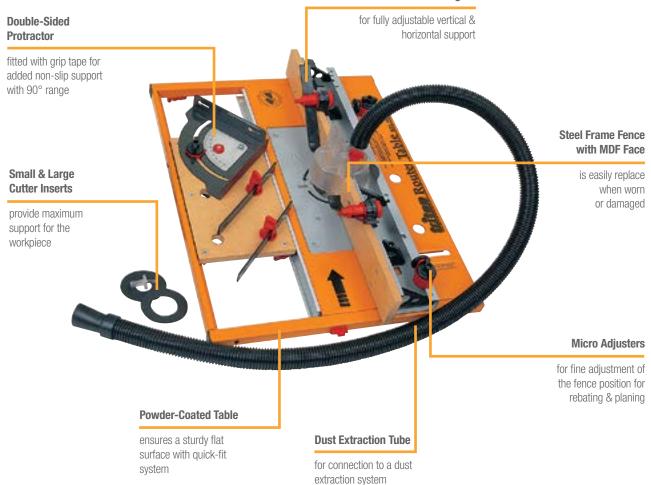

Technical Specification

Table Size 540 x 690mm / 21 x 27" Cuts Planing, Trenching, Rebating, Moulding, Endgrain Work, Free-hand work

Bevel Adjustment **Dust Extraction** Yes Weight 11kg / 24lbs

Included Accessorie

Planing shims, alignment tool & cutter inserts

Item	Part No.	Description
801245	TRI-RTA300	Router Table



Safe free-hand operation when safety guard is fitted on its own to the table top.

Router Not Included



Router Table shown mounted on Triton Workcentre. Router Not Included



Steel frame fence with MDF face. Faces are easily replaced when worn.

Router Not Included

Router Table - Series 2000

RSA 300

Purpose-designed support stand for use with the Triton Router Table. Features include adjustable leg height for stability on uneven ground, and on / off switch with quick-stop panel for added safety. The stand also folds down for convenient transportation and storage.

- Safety on/off switch
- Adjustable leg height
- Onboard leg storage
- Folds down for easy transportation
- Compatible with all Triton Router Tables





Folds down for easy transportation and storage Power Switch controls power to the power tool with quick stop panel for added safety Folds down for easy transportation and storage Adjustable Legs for easy operation on uneven work surfaces

Onboard Leg Storage

Item	Part No.	Description
801241	TRI-RSA300	Triton Router Stand

Technical Specification Table Size 650 x 690mm / 25 x 27	

Router Table Accessories - Series 2000

Finger Jointer

- Creates strong, accurate 1/4" & 1/2" decorative box joints ... 1/2" cutter included
- Suitable for 3 32mm board thickness
- Cuts several joints simultaneously
- Dust extraction port
- Compatible with Triton Router Table RTA300





Item	Part No.	Description
801216	TRI-FJA300	Finger Jointer

Biscuit Joiner

- Ideal for bevel, mitre & edge joinery
- Quick & easy to fit
- Fast, strong & invisible jointing of timber sections
- Includes TCT cutter & pack of biscuits
- Compatible with 1/4" & 1/2" routers



Item	Part No.	Description
801191	TRI-BJA300	Biscuit Joiner
801189	TRI-BJA050	Biscuits, Pack of 50
801190	TRI-BJA056	Biscuits, Pack of 500

Workcentre Accessories - Series 2000

Overhead Mounting Kit

- Robust steel construction
- Router slide plate for overhead work
- Suits most routers for cross trenching on Triton Workcentres (except TWX7)
- Offers high accuracy for shelving, cabinets & built-in cupboards

Blade Height Winder Kit

- Quick, precise blade height adjustment:
 - by winder through the table slot
 - by thumb wheel in crosscut mode
- Allows saw to remain at its full depth
- Compatible with Workcentre System Series 2000

Workcentre Dust Bag

- Easy-to-fit
- Detachable pouch
- Bayonet & tapered hose connectors
- Vacuum hose
- Fits most Triton Workcentres









TRI-WCA390



P		
Item	Part No.	

Item Part No.		Description	
801209	TRI-DCA250	Workcentre Dust Bag	

	-0
	-
1	
Item	Part No.

Item	Part No.	Description
801182	TRI-AJA150	Router Mounting Plate

Planer Attachment Kit

- For perfectly smooth, straight faces
- Includes detachable dust collection bag
- Quick, fold-away action for fast changes between planer & saw modes
- Adjustable pressure fingers

Mini Sliding Extension Table

- Separate switch box with safety shut-off
- Suits most 82mm electric planers

Bevel Ripping Guide

Description

Height Winder Kit

- Enables accurate bevels & chamfers from 15 90°
- Integral calibration for easy alignment
- Fully adjustable to handle long & wide workpieces
- Compatible with Triton Workcentre System 2000





Power Tool NOT included

Crosscut capacity up to 600mm, rip capacity up to 1000mm

Compatible with Triton Workcentres (except TWX7),

Saw Tables and Router Stand RSA300

Easy-to-read calibration scales

Item	Part No.	Description
801211	TRI-FPA001	Planer Attachment Kit





Maxi Sliding Extension Table

- Cross cut capacity up to 1200mm
- Rip capacity up to 1220mm accommodates 2400 x 1200mm sheets
- Easy-to-read calibration scales
- Table can be locked in position
- Sliding Table acts as panel saw
- Compatible with Triton Workcentres (except TWX7)





Ask for a woodworking demonstration, available from your Triton Platinum distributor:

P AUS/NZ T TRITON BR 2017

WHITE INTERNATIONAL PTY LTD

60 Ashford Ave Milperra NSW 2214 PO Box 304 Milperra NSW 2214 Phone 02 9783 6000 Fax 02 9783 6001 Customer Service 1300 780 876 Email Sales: sales@whiteint.com.au General Info: info@whiteint.com.au www.whiteint.com.au

WHITE INTERNATIONAL NZ LTD

15G Kerwyn Avenue
East Tamaki, Auckland 2013, New Zealand
Phone 09 579 9777 Fax 09 579 7775
Customer Service 0800 509 506
Customer Service Fax 0800 804 344
Email Sales: sales@whiteint.co.nz
www.whiteint.co.nz

Please always refer to our website for further technical information & new product innovations

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications. Product images are representations only.



Scan QR Code on your smart phone or iPad to save a digital version.

