PRODUCT DATA SHEET

DAB-200MP • 701399





PRODUCT DETAILS

The DAB 200MP is a robust, single impeller, self-priming, surface mounted, jet type pump pump suitable for pumping water with low levels of sandy impurities. The internal jet and venturi provide excellent suction capability of up to 8m even when the water is lightly aerated.

APPLICATIONS

- Situations where self priming operation is necessary
- Suppying water to domestic installations
- Ideal for use in small-scale agriculture or horticulture
- Pressure boosting, irrigation, wash down or other limited industrial services
- Designed for pumping from tanks, rivers and dams where air bubbles or small particles of sand are present

FEATURES

- Pressure switch with adjustable differential
- Pump Start 1.7 bar. Pump stop 3.0 bar
- Pressure gauge
- Self priming centrifugal pump with excellent suction capability
- 230V single phase TEFC motor with in-built auto reset thermal overload to prevent pump from damage

To protect the pump from excessive cycling and to isolate from the effects of water hammer, adding a pressure tank to the system is highly recommneded


TECHNICAL DATA

RATED POWER (P2)	1.5kW (2hp)				
MAX. FLOW [LPM]	185 LPM				
MAX. HEAD [M]	41m				
MAX. PRESSURE RATING	8 bar				
FLUID TEMP RANGE	0 - 35 deg C				
MAX. AMBIENT TEMP	40 deg C				
PUMP BODY	GJL 200 Cast Iron				
IMPELLER	Glass reinforced Noryl				
JET, VENTURI, DIFFUSER	Glass reinforced Noryl				
MECHANICAL SEAL	Carbon Ceramic Nitrile				
O RINGS	Nitrile				


RATED VOLTAGE (V)	1~ 220 - 240V 50 hz				
RATED CURRENT (A)	9A				
RATED SPEED (RPM)	2800 - 2 pole				
IP RATING	I.P. 44				
SUCTION CONNECTION	1 1/2" G (BSP)				
DISCHARGE CONNECTION	1 1/4" G (BSP)				
AUTOMATIC OPERATION	No - bare pump only				
MOTOR PROTECTION	Auto re-setting thermal overload				
CAPACITOR	31.5uF 450V =/- 5%				
CARTON DIMENSIONS	600mm L x 236mm W x 267mm H				
GROSS WEIGHT (KG)	27.5kg				




CURVE

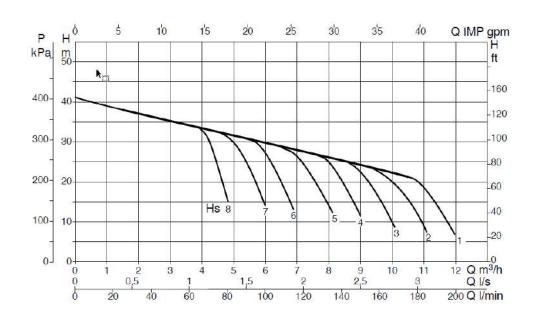

DIMENSIONS

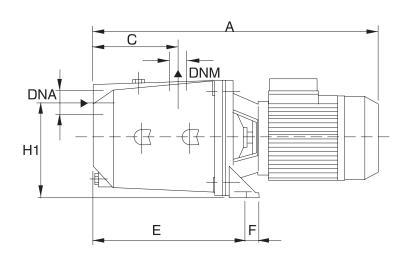



MODEL	A	В	С	E	F	G	ΙØ	Н	H1	DNA GAS	DNM GAS
JET 200 MP	521	214	151	282	20	160	11	227	175	1½"	1¼"

WARRANTY / CERTIFICATIONS





